

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/7/11	C. Chen

TECHNICAL DATA

► Electrical Data



Pass Band Frequency	DC-7000MHz
Pass Band Insertion Loss	≤1.5dB
Pass Band VSWR	≤1.8:1
Stop Band Rejection	≥40dB@8050~14000MHz
Impedance	50 Ohms
Power Handling	20W

► Mechanical Data

Dimensions	32×20×10mm
Connectors	SMA-Female(stainless steel)
Surface Finish	Silver Plated
Body	Aluminum 6061

► Environmental Data

Temperature Range	-40℃~+85℃(design assurance)
-------------------	-----------------------------

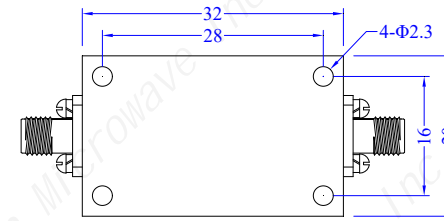

DRAWN: L. Ma 11/07/23		
ENGINEER: J. Zhu 11/07/23		
APPROVED: C. Chen 11/07/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Low Pass Filter, DC-7000MHz, Stop Band Rejection 40dB, 20W, SMA-Female

PART No.:
TLF-7000-40S

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
--------------------	---------------	----------------------	------------------

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY