

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/7/11	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Pass Band Frequency	DC-5150MHz
Pass Band Insertion Loss	≤2.0dB
Pass Band VSWR	≤2.0:1
Stop Band Rejection	≥50dB@6000~16000MHz
Impedance	50 Ohms
Power Handling	15W

### ► Mechanical Data

Dimensions	56×22×12mm
Connectors	SMA-Female
Surface Finish	Black Painted

### ► Environmental Data

Operating Temperature	-40℃~+70℃
Storage Temperature	-55℃~+85℃

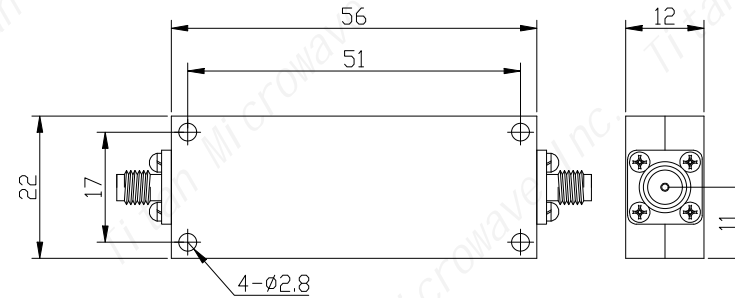

#### Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 11/07/23		
ENGINEER: J. Zhu 11/07/23		
APPROVED: C. Chen 11/07/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

**TITLE:**  
Low Pass Filter, DC-5150MHz, Stop Band Rejection 50dB, 15W, SMA-Female

**PART No.:**  
TLF-5150-50S



[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

<b>SIZE:</b> A4	<b>SCALE:</b>	<b>SHEET:</b> 1/1	<b>REV:</b> A
--------------------	---------------	----------------------	------------------