

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

TECHNICAL DATA

► Electrical Data


Stop Band Frequency	2010~2200MHz
Stop Band Attenuation	≥50dB
Pass Band Frequency	DC~1953MHz & 2245~5700MHz
Pass Band Insertion Loss	≤1.5dB(at the corner ≤2dB)
Pass Band VSWR	≤1.5:1@700~1953MHz & 2245~5300MHz ≤1.6:1@DC~700MHz ≤1.7:1@5300~5700MHz
Power Handling	≤10W
Impedance	50 Ohms

► Mechanical Data

Dimensions	209×39×22mm
Connectors	SMA-Female
Connector Material	Stainless Steel
Surface Finish	Black Painted

► Environmental Data

Temperature Range	-30℃~+70℃
-------------------	-----------

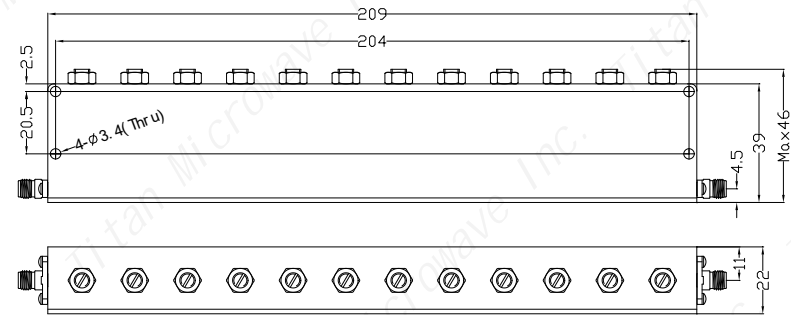

DRAWN: L. Ma 12/09/23		
ENGINEER: J. Zhu 12/09/23		
APPROVED: C. Chen 12/09/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:

Band Reject Filter,
2.01~2.2GHz, Stop Band
Rejection 50dB, 10W,
SMA-Female

PART No.:

TRF-02010220-50S



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY