

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

TECHNICAL DATA

► Electrical Data


Stop Band Frequency	2475~2525MHz
Stop Band Attenuation	≥60dB
Pass Band Frequency	DC~2450MHz & 2550~6600MHz
Pass Band Insertion Loss	≤1.5dB@DC~2435MHz & 2565~6600MHz ≤2.5dB@2435~2450MHz & 2550~2565MHz
Pass Band VSWR	≤1.5:1
Power Handling	≤50W
Impedance	50 Ohms

► Mechanical Data

Dimensions	209×38×22mm
Connectors	SMA-Female
Connector Material	Stainless Steel
Surface Finish	Black Painted

► Environmental Data

Temperature Range	-20℃~+60℃
-------------------	-----------

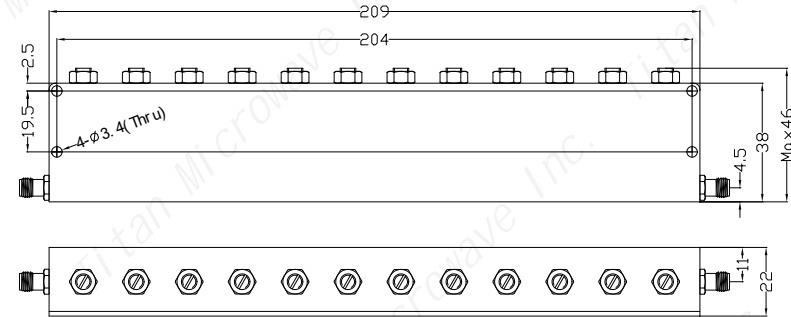

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/09/23		
ENGINEER: J. Zhu 12/09/23		
APPROVED: C. Chen 12/09/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:

Band Reject Filter,
2.475~2.525GHz, Stop
Band Rejection 60dB,
50W, SMA-Female

PART No.:

TRF-02470252-60S



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------