

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

TECHNICAL DATA

► Electrical Data


Stop Band Frequency	703~733MHz
Stop Band Attenuation	≥40dB
Pass Band Frequency	DC~683MHz & 753~2100MHz
Pass Band Insertion Loss	≤1.0dB(at the corner ≤1.5dB)
Pass Band VSWR	≤1.5:1@DC~683MHz & 753~1900MHz ≤1.7:1@1900~2100MHz
Power Handling	≤10W
Impedance	50 Ohms

► Mechanical Data

Dimensions	265×94×28mm
Connectors	SMA-Female
Connector Material	Stainless Steel
Surface Finish	Black Painted

► Environmental Data

Temperature Range	-30℃~+70℃
-------------------	-----------

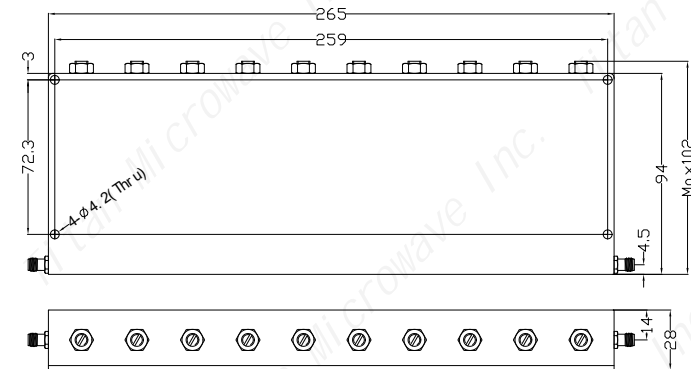

DRAWN: L. Ma 12/09/23		
ENGINEER: J. Zhu 12/09/23		
APPROVED: C. Chen 12/09/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:

Band Reject Filter,
703~733MHz, Stop Band
Rejection 40dB, 10W,
SMA-Female

PART No.:

TRF-703M733M-40S



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY