

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

TECHNICAL DATA

► Electrical Data


Stop Band Frequency	902~928MHz
Stop Band Attenuation	≥50dB
Pass Band Frequency	DC~882MHz & 948~2700MHz
Pass Band Insertion Loss	≤1.0dB@DC~872MHz & 958~2700MHz ≤2.0dB@872~882MHz & 948~958MHz
Pass Band VSWR	≤1.5:1
Power Handling	≤20W
Impedance	50 Ohms

► Mechanical Data

Dimensions	265×77×28mm
Connectors	SMA-Female
Connector Material	Copper H59
Surface Finish	Black Painted

► Environmental Data

Temperature Range	-30℃~+70℃
-------------------	-----------

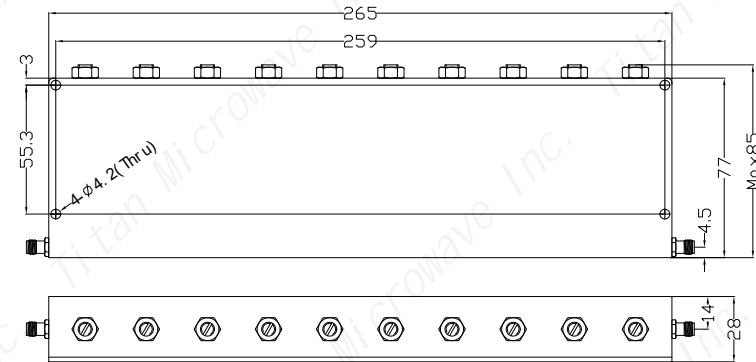

DRAWN: L. Ma 12/09/23		
ENGINEER: J. Zhu 12/09/23		
APPROVED: C. Chen 12/09/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Band Reject Filter,
902~928MHz, Stop Band
Rejection 50dB, 20W,
SMA-Female

PART No.:
TRF-902M928M-50S

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
--------------------	---------------	----------------------	------------------

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY