

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

TECHNICAL DATA

► Electrical Data


Stop Band Frequency	1920~1980MHz
Stop Band Attenuation	≥35dB
Pass Band Frequency	DC~1910MHz & 1990~5500MHz
Pass Band Insertion Loss	≤2.0dB@DC~1905MHz & 1995~5500MHz ≤3.5dB@1905~1910MHz & 1990~1995MHz
Pass Band VSWR	≤1.5:1
Power Handling	≤30W
Impedance	50 Ohms

► Mechanical Data

Dimensions	209×45×22mm
Connectors	SMA-Female
Connector Material	Copper H59
Surface Finish	Black Painted

► Environmental Data

Temperature Range	-10℃~+40℃
-------------------	-----------

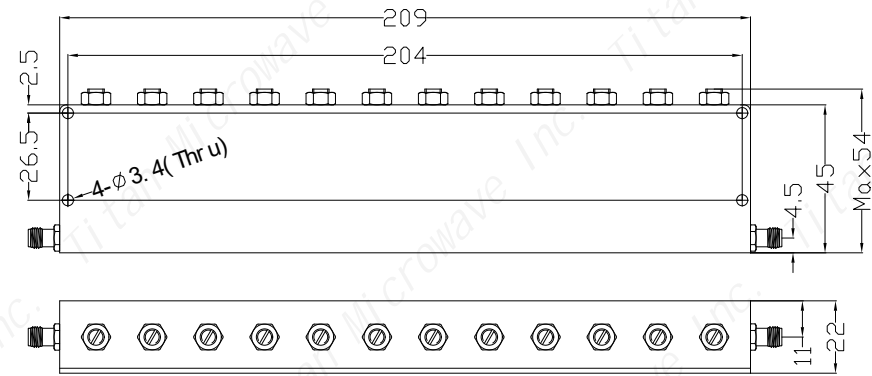

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/09/23		
ENGINEER: J. Zhu 12/09/23		
APPROVED: C. Chen 12/09/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Band Reject Filter,
1.92~1.98GHz, Stop
Band Rejection 35dB,
30W, SMA-Female

PART No.:
TRF-01920198-35S



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
--------------------	---------------	----------------------	------------------