

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

TECHNICAL DATA

► Electrical Data


Stop Band Frequency	857~907MHz
Stop Band Attenuation	≥70dB
Pass Band Frequency	DC~812MHz & 970~2500MHz
Pass Band Insertion Loss	≤1.5dB(at the corner ≤2dB)
Pass Band VSWR	≤1.5:1@400~812MHz & 970~2300MHz ≤1.6:1@DC~400MHz & 2300~2500MHz
Power Handling	≤10W
Impedance	50 Ohms

► Mechanical Data

Dimensions	265×69×28mm
Connectors	SMA-Female
Connector Material	Copper H59
Surface Finish	Black Painted

► Environmental Data



Temperature Range	-30℃~+70℃
-------------------	-----------

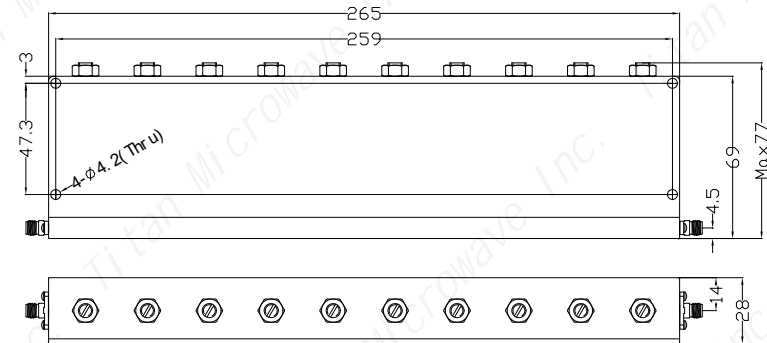

DRAWN: L. Ma 12/09/23		
ENGINEER: J. Zhu 12/09/23		
APPROVED: C. Chen 12/09/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Band Reject Filter,
857~907MHz, Stop Band
Rejection 70dB, 10W,
SMA-Female

PART No.:
TRF-857M907M-70S

 成都巨人微波 TITAN MICROWAVE INC. <small>- A Professional RF & Microwave Components Supplier -</small>			
www.titan-microwave.com			
  DIMENSIONS IN MILLIMETERS(mm)			
SIZE: A4	SCALE:	SHEET: 1/1	REV: A

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY