

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Stop Band Frequency	814~849MHz
Stop Band Attenuation	≥60dB
Pass Band Frequency	DC~789MHz & 890~2500MHz
Pass Band Insertion Loss	≤1.4dB
Pass Band VSWR	≤1.7:1@2200~2500MHz ≤1.5:1@DC~789MHz & 890~2200MHz
Power Handling	≤10W
Impedance	50 Ohms

### ► Mechanical Data

Dimensions	265×77×28mm
Connectors	SMA-Female
Connector Material	Copper H59
Surface Finish	Black Painted

### ► Environmental Data

Temperature Range	-20℃~+60℃
-------------------	-----------

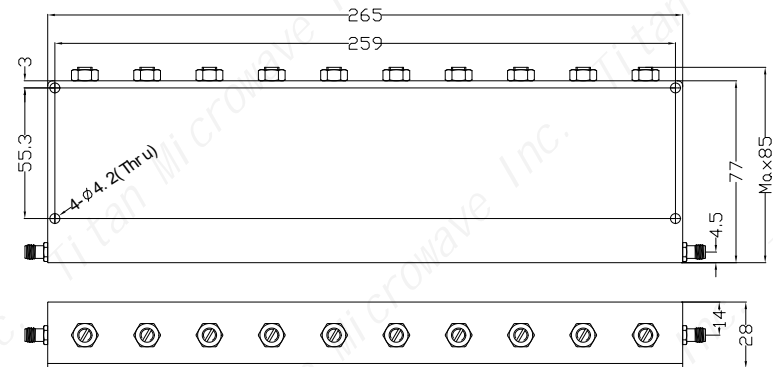

#### Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/09/23		
ENGINEER: J. Zhu 12/09/23		
APPROVED: C. Chen 12/09/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

#### TITLE:


Band Reject Filter,  
814~849MHz, Stop Band  
Rejection 60dB, 10W,  
SMA-Female

#### PART No.:

TRF-814M849M-60S



[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------