

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

TECHNICAL DATA

► Electrical Data


Stop Band Frequency	5040~5060MHz
Stop Band Attenuation	≥50dB
Pass Band Frequency	DC~5010MHz & 5090~12000MHz
Pass Band Insertion Loss	≤1.7dB@DC~4990MHz & 5110~11000MHz ≤2.7dB@4990~5010MHz & 5090~5110MHz
Pass Band VSWR	≤1.5:1
Power Handling	≤10W
Impedance	50 Ohms

► Mechanical Data

Dimensions	141×28×16mm
Connectors	SMA-Female
Connector Material	Stainless Steel
Surface Finish	Black Painted

► Environmental Data

Temperature Range	+10℃~+40℃
-------------------	-----------

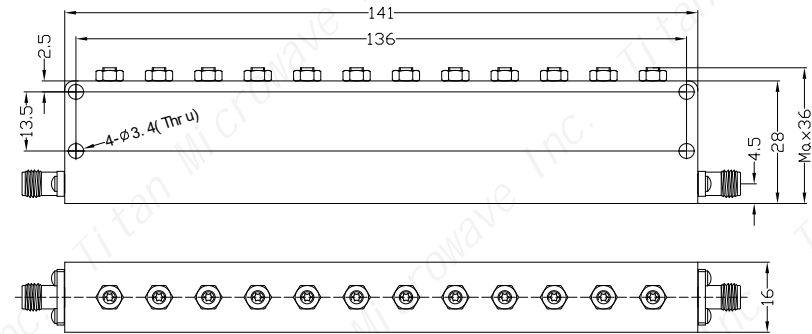

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/09/23		
ENGINEER: J. Zhu 12/09/23		
APPROVED: C. Chen 12/09/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:


Band Reject Filter,
5.04~5.06GHz, Stop
Band Rejection 50dB,
10W, SMA-Female

PART No.:

TRF-05040506-50S



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------