

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/12	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Stop Band Frequency	5725~5850MHz
Stop Band Attenuation	≥45dB
Pass Band Frequency	DC~5695MHz & 5880~8000MHz
Pass Band Insertion Loss	≤4.0dB
Pass Band VSWR	≤1.7:1
Power Handling	≤50W
Impedance	50 Ohms

### ► Mechanical Data

Dimensions	137×28×11mm
Connectors	SMA-Female
Connector Material	Stainless Steel
Surface Finish	Black Painted

### ► Environmental Data

Temperature Range	-30℃~+70℃
-------------------	-----------

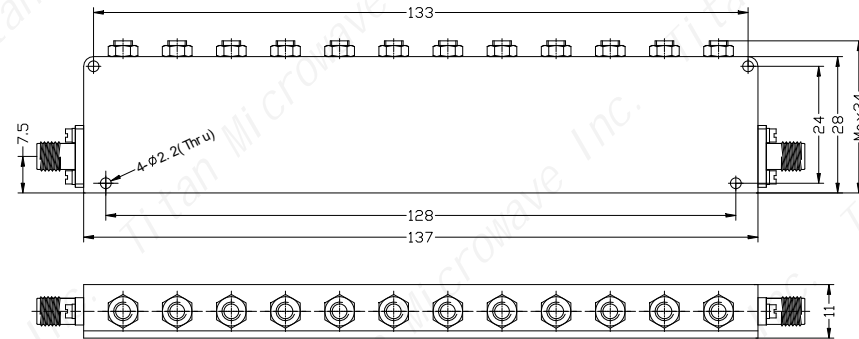

#### Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 12/09/23		
ENGINEER: J. Zhu 12/09/23		
APPROVED: C. Chen 12/09/23		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

**TITLE:**  
 Band Reject Filter,  
 5.725~5.85GHz, Stop  
 Band Rejection 45dB,  
 50W, SMA-Female

**PART No.:**  
 TRF-05720585-45S



[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------