


**TMPD4-32003800-20K**

**32 to 38 GHz, 20W, 2.92mm-Female  
 2-WAY POWER DIVIDER**

**Electrical Characteristics**

<b>Frequency Range</b> .....	32~38GHz
<b>Insertion Loss</b> .....	1.6dB max (excluding theoretical loss 6.0dB)
<b>Amplitude Balance</b> .....	±0.4dB max
<b>Phase Balance</b> .....	±5° max
<b>VSWR(input port)</b> .....	1.28 typ, 1.5:1 max
<b>VSWR(output ports)</b> .....	1.26 typ, 1.5:1 max
<b>Isolation</b> .....	16dB min, 22dB typ
<b>Impedance</b> .....	50 Ohms
<b>Power Rating</b> .....	20W(as a splitter)
<b>Power Rating</b> .....	1W(as a combiner)

**Outline Drawing(mm[inch])**

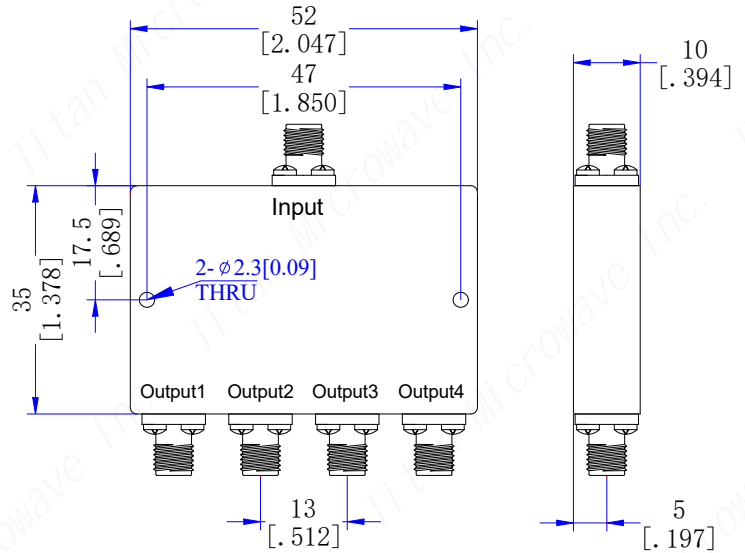

**Mechanical & Environmental Characteristics**

<b>Dimensions</b> .....	52 × 35 × 10mm
<b>RF Connectors</b> .....	2.92mm-Female
<b>Surface Finishing</b> .....	Black/Blue/Gray Paint
<b>Operating Temperature</b> .....	-40°C~+85°C
<b>Storage Temperature</b> .....	-50°C~+105°C
<b>Weight</b> .....	75g