

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/6/15	C. Chen

TECHNICAL DATA

Electrical Data


Frequency Range	3000~6000MHz
Insertion Loss (excluding theoretical loss 10.8dB)	1.2dB max
Isolation	18dB min, 25dB typ
Input VSWR	1.26 typ, 1.35 max
Output VSWR	1.18 typ, 1.25 max
Amplitude Balance	±0.6dB
Phase Balance	±6°
Power Rating	10W(as a splitter)
Power Rating	1W(as a combiner)
Impedance	50 Ohms

Mechanical Data

Dimensions	156×92×10mm
Input/Output Connectors	SMA-Female
Connectors Material	Passivated Stainless Steel
Surface Finish	Grey/Black/Blue Painted

Environmental Data

Operating Temperature	-45℃~+85℃
-----------------------	-----------

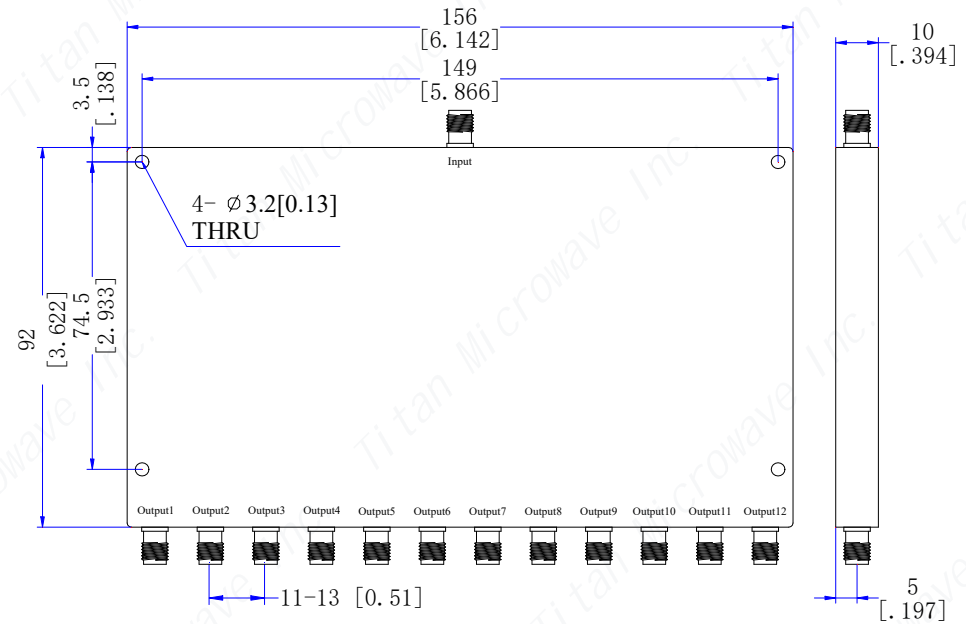

DRAWN: L. Ma 15/06/22		
ENGINEER: J. Zhu 15/06/22		
APPROVED: C. Chen 15/06/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Power Divider, 12-Way,
3-6GHz, 10W, SMA-
Female

PART No.:
TMPD12-03000600-10S

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
--------------------	---------------	----------------------	------------------

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY