

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

Electrical Data


Frequency Range	380~6000MHz
Insertion Loss	3.4dB max
(excluding theoretical loss 9.0dB)	
Input Port VSWR	1.18 typ, 1.35 max
Output Port VSWR	1.15 typ, 1.25 max
Isolation	18dB min, 28dB typ
Amplitude Balance	±0.4dB
Phase Balance	±5°
Impedance	50 Ohms
Power Rating	20W(as a splitter)
Power Rating	1W(as a combiner)

Mechanical Data

Input/Output Connectors	SMA-Female
Dimensions	128×108×10mm
Surface Finish	Black/Blue/Gray Painted

Environmental Data

Operating Temperature	-40℃~+70℃
-----------------------	-----------

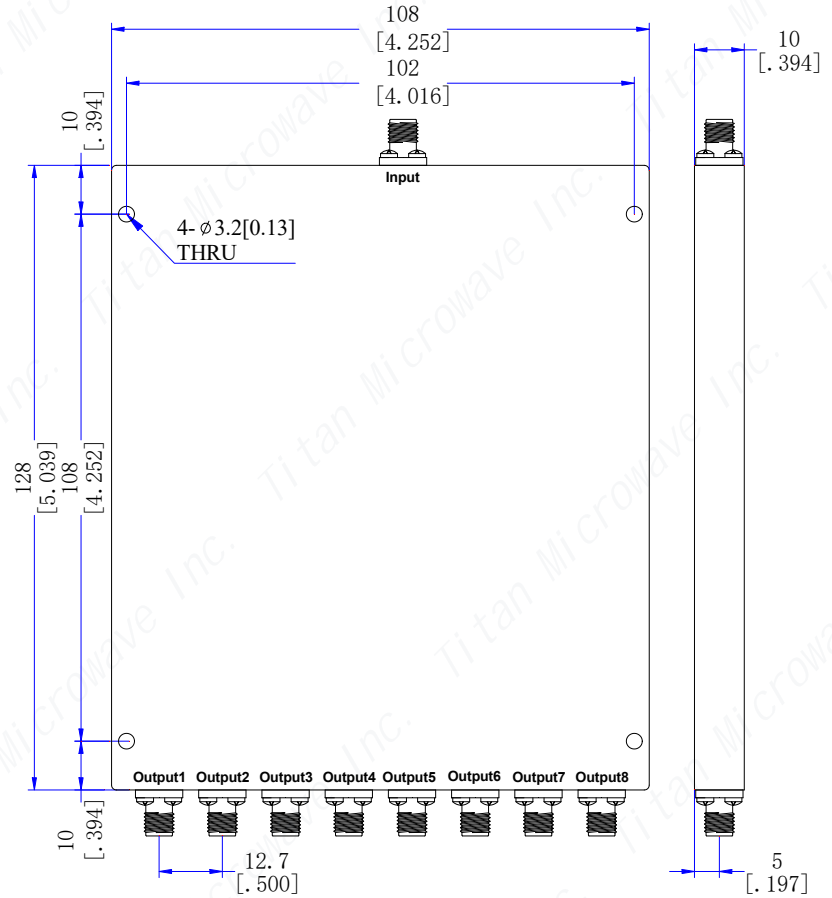

- Notes:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 - CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22		
ENGINEER: J. Zhu 21/12/22		
APPROVED: C. Chen 21/12/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Power Divider, 8 Way,
0.38~6GHz, 20W, SMA-
Female

PART No.:
TMPD8-00380600-20S

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com

DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------