

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	600~6000MHz
Insertion Loss (excluding theoretical loss 10.2dB)	2.8dB max
Input Port VSWR	1.28 typ, 1.50 max
Output Port VSWR	1.18 typ, 1.30 max
Isolation	18dB min, 25dB typ
Amplitude Balance	±1.2dB
Phase Balance	±10°
Impedance	50 Ohms
Power Rating	20W(as a splitter)
Power Rating	1W(as a combiner)

► Mechanical Data

Input/Output Connectors	SMA-Female
Connectors Material	Passivated Stainless Steel
Dimensions	134×113×10mm
Surface Finish	Black/Blue/Gray Painted

► Environmental Data

Operating Temperature	-45°C~+85°C
-----------------------	-------------

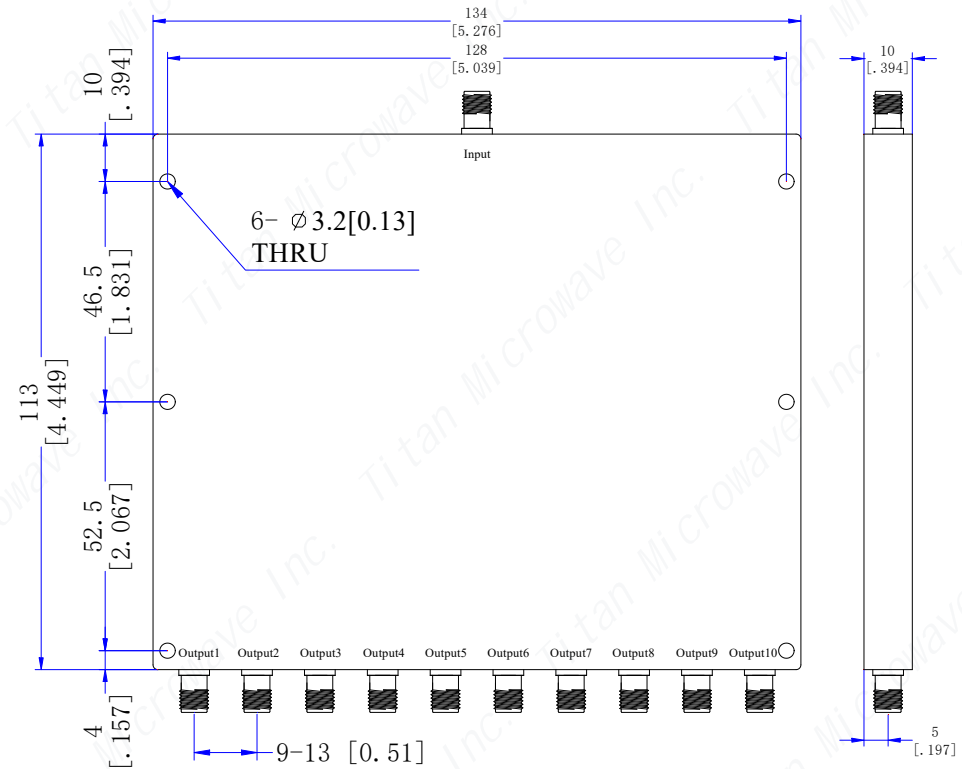

DRAWN: L. Ma 21/12/22		
ENGINEER: J. Zhu 21/12/22		
APPROVED: C. Chen 21/12/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Power Divider, 10 Way,
0.6~6GHz, 20W,
SMA-Female

PART No.:
TMPD10-00600600-20S



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY