

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	0.5~26.5GHz
Insertion Loss	8.0dB max
(excluding theoretical loss 9.0dB)	
Input Port VSWR	1.40 typ, 1.70 max
Output Port VSWR	1.25 typ, 1.60 max
Isolation	15dB min, 22dB typ
Amplitude Balance	±0.5dB
Phase Balance	±10°
Impedance	50 Ohms
Power Rating	20W(as a splitter)
Power Rating	1W(as a combiner)

► Mechanical Data

Input/Output Connectors	SMA-Female
Connectors Material	Stainless Steel
Dimensions	146×161.9×10mm
Surface Finish	Black/Blue/Gray Painted
Weight	700g

► Environmental Data

Operating Temperature	-45℃~+85℃
-----------------------	-----------

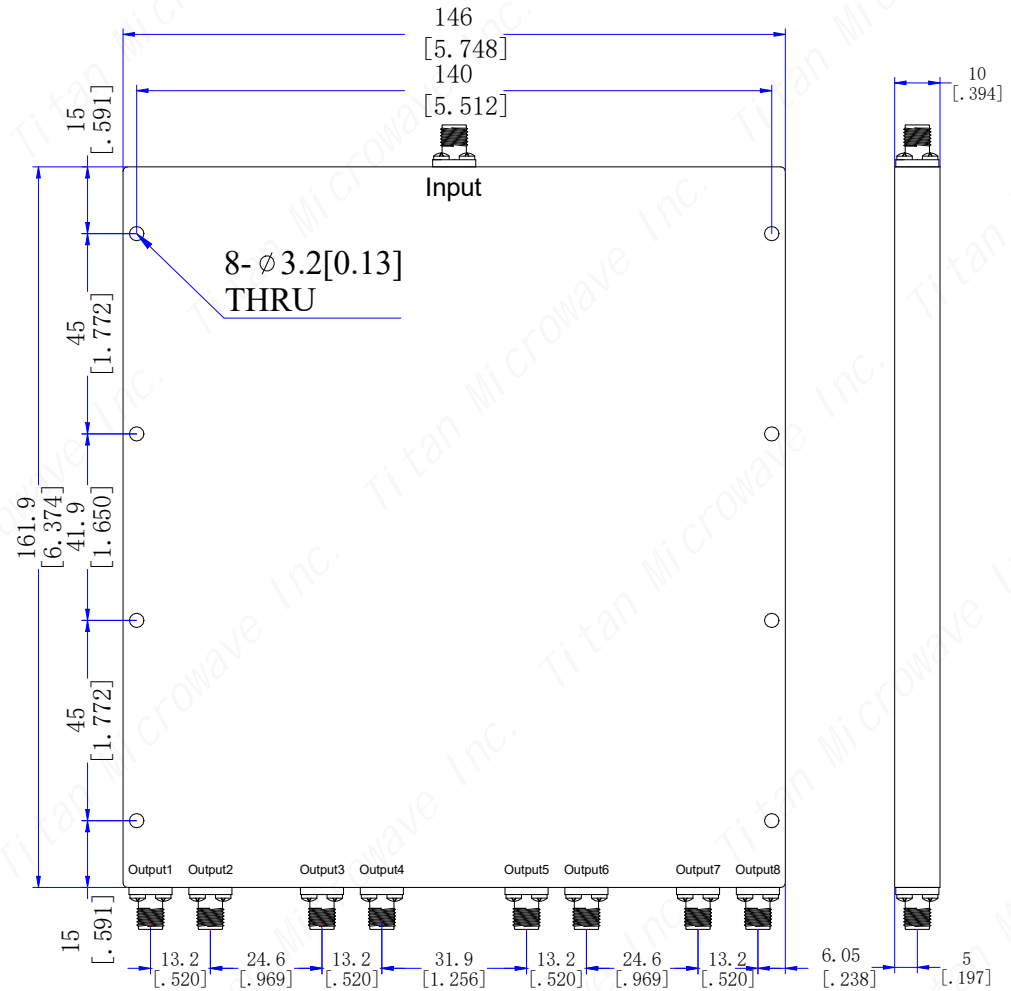

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22		
ENGINEER: J. Zhu 21/12/22		
APPROVED: C. Chen 21/12/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Power Divider, 8 Way,
0.5~26.5GHz, 20W,
SMA-Female

PART No.:
TMPD8-00502650-20SB

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
--------------------	---------------	----------------------	------------------