

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/6/15	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	1~2GHz
Insertion Loss (excluding theoretical loss 10.2dB)	0.8dB max
Isolation	18dB min, 25dB typ
Input VSWR	1.28 typ, 1.40 max
Output VSWR	1.18 typ, 1.40 max
Amplitude Balance	±0.4dB
Phase Balance	±4°
Power Rating	10W(as a splitter)
Power Rating	1W(as a combiner)
Impedance	50 Ohms

### ► Mechanical Data

Dimensions	142×136×12mm
Input/Output Connectors	SMA-Female
Connectors Material	Passivated Stainless Steel
Surface Finish	Grey/Black/Blue Painted

### ► Environmental Data

Operating Temperature	-35℃~+75℃
-----------------------	-----------

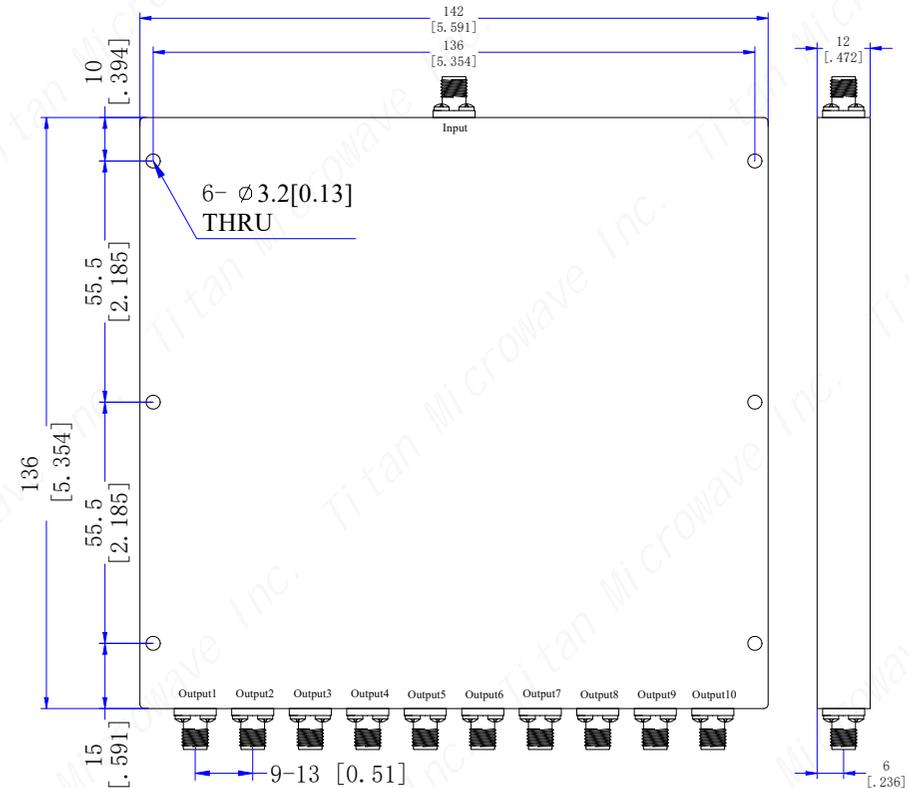

DRAWN: L. Ma 15/06/22		
ENGINEER: J. Zhu 15/06/22		
APPROVED: C. Chen 15/06/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

**TITLE:**  
Power Divider, 10-Way,  
1-2GHz, 10W,  
SMA-Female

**PART No.:**  
TMPD10-01000200-10S

**成都巨人微波**  
**TITAN MICROWAVE INC.**  
- A Professional RF & Microwave Components Supplier -

[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

<b>SIZE:</b> A4	<b>SCALE:</b>	<b>SHEET:</b> 1/1	<b>REV:</b> A
--------------------	---------------	----------------------	------------------

**Notes:**

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY