
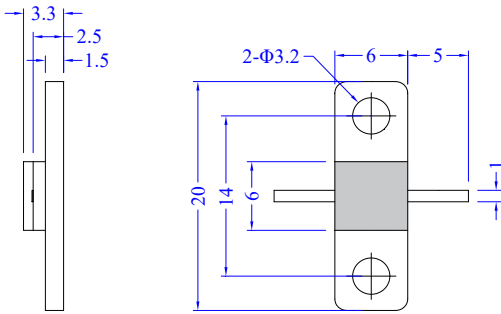


# Flanged Attenuators

## General Specifications

- **Frequency Range:** DC to 6GHz
- **Impedance:** 50 Ohms
- **VSWR:** 1.25 max
- **Rated Power:** 60W
- **Temperature Coefficient:** <150ppm/°C
- **Substrate Material:** Beryllium Oxide(BeO)
- **Porcelain Hat Material:** Aluminum Oxide(Al<sub>2</sub>O<sub>3</sub>)
- **Flange:** Nickel-plated Copper
- **Lead:** 99.99% Sterling Silver
- **Resistance Technology:** Thick Film
- **Operating Temperature:** -55°C~+150°C

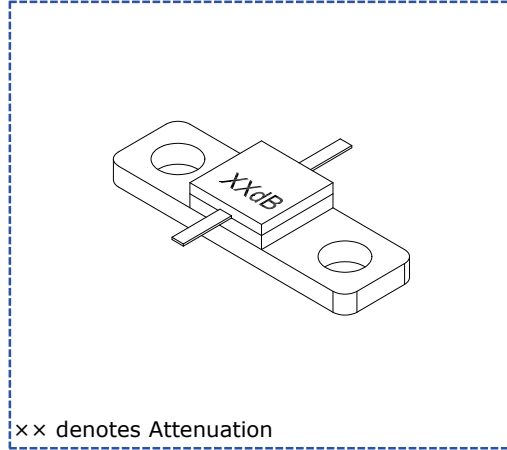

**Dimensions tolerance:5%**  
 unless otherwise specified

Attenuation Value(dB)	1-10	15, 20	25, 30
Attenuation Deviation from Nominal(dB)	±0.6	±0.8	±1.0

## Ordering Information:

**TFMA 0620 - 6 N 60 AM - 30**

Titan Microwave  
 Flanged Mount Attenuator

Case Size

Frequency Range

Substrate Material

N: Aluminum Nitride(AlN)  
 A: Aluminum Oxide(Al<sub>2</sub>O<sub>3</sub>)  
 No Designation for Beryllium Oxide(BeO)

Power Rating(W)


AM: Aluminum cap

AJ: Dielectric cap

dB value

(See Above Chart for Available Values)

## Installation Method

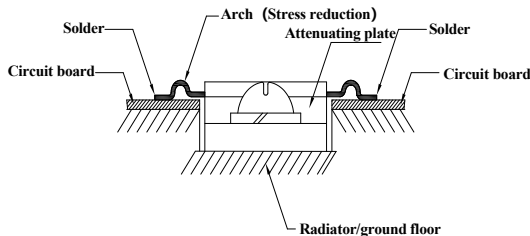

## Derating Curve

