



Flanged Attenuators

General Specifications

- **Frequency Range:** DC to 6GHz
- **Impedance:** 50 Ohms
- **VSWR:** 1.25 max
- **Rated Power:** 60W
- **Temperature Coefficient:** <150ppm/°C
- **Substrate Material:** Aluminum Nitride(AlN)
- **Porcelain Hat Material:** Aluminum Oxide(Al₂O₃)
- **Flange:** Nickel-plated Copper
- **Lead:** 99.99% Sterling Silver
- **Resistance Technology:** Thick Film
- **Operating Temperature:** -55°C~+150°C



xx denotes Attenuation

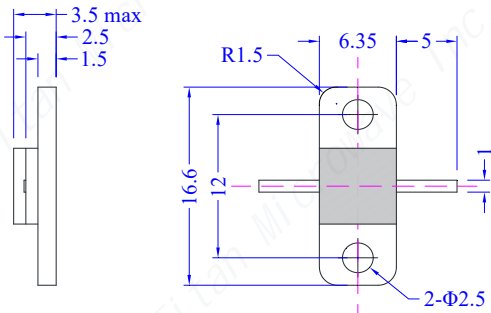

Dimensions tolerance:5%
 unless otherwise specified

Attenuation Value(dB)	-	-	20
Attenuation Deviation from Nominal(dB)	-	-	±0.8

Ordering Information:

TFMA 6316 - 6 N 60 AM - 20

Titan Microwave
 Flanged Mount Attenuator

Case Size

Frequency Range(GHz)

Substrate Material

N: Aluminum Nitride(AlN)
 A: Aluminum Oxide(Al₂O₃)
 No Designation for Beryllium Oxide(B₂O)

Power Rating(W)


AM: Aluminum cap

AJ: Dielectric cap

dB value

(See Above Chart for Available Values)

Installation Method

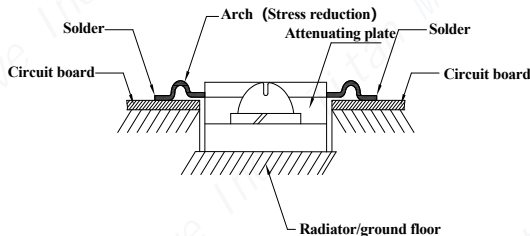

Derating Curve

