


**TMPD2-15002000-20S**

**15 to 20 GHz, 20W, SMA-Female  
 2-WAY POWER DIVIDER**

**Electrical Characteristics**

<b>Frequency Range</b> .....	15~20GHz
<b>Insertion Loss</b> .....	0.5dB max (excluding theoretical loss 3.0dB)
<b>Amplitude Balance</b> .....	±0.3dB
<b>Phase Balance</b> .....	±4°
<b>VSWR(input port)</b> .....	1.28:1 typ, 1.5:1 max
<b>VSWR(output ports)</b> .....	1.26:1 typ, 1.3:1 max
<b>Isolation</b> .....	18dB min, 22dB typ
<b>Impedance</b> .....	50 Ohms
<b>Power Handling</b> .....	20W(as a splitter) 1W(as a combiner)

**Outline Drawing(mm[inch])**

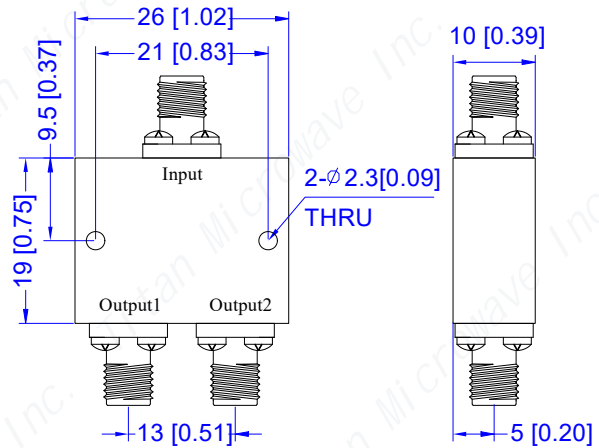

**Mechanical & Environmental Characteristics**

<b>Dimensions</b> .....	26 × 19 × 10mm
<b>RF Connectors</b> .....	SMA-Female(stainless steel)
<b>Material</b> .....	Aluminum
<b>Surface Finishing</b> .....	Black/Blue/Gray Paint
<b>Operating Temperature</b> .....	-40°C~+85°C
<b>Storage Temperature</b> .....	-50°C~+105°C