

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2024/6/11	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	0.8~2.5GHz
Output Power(P1dB)	15dBm min
Gain	32dB min
Gain Flatness	±1.0dB typ, ±1.5dB max
Noise Figure	0.7dB typ, 1.0dB max
VSWR	1.8:1 typ, 2.0:1 max
Impedance	50 Ohms
Voltage	+12V
Current	150mA

### ► Mechanical Data

Dimensions	18×18×10mm
Input/Output Connectors	SMA-Female(stainless steel)
Surface Finish	Gold Plated

### ► Environmental Data

Operating Temperature	-40℃~+70℃(design assurance)
-----------------------	-----------------------------

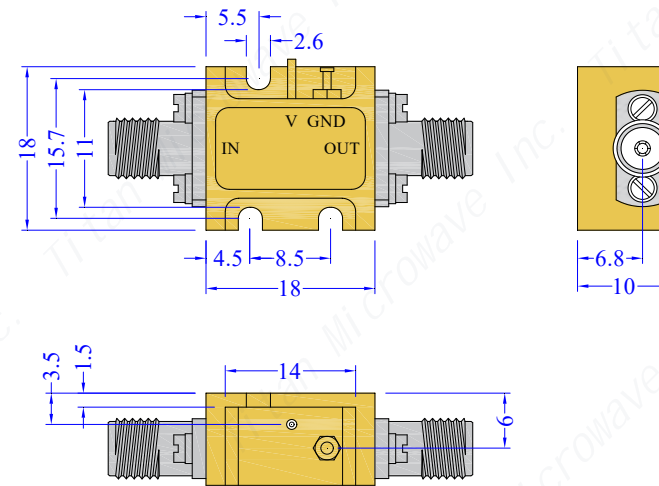

#### Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 11/06/24		
ENGINEER: J. Zhu 11/06/24		
APPROVED: C. Chen 11/06/24		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

#### TITLE:

Low Noise Amplifier, 0.8-2.5GHz, Gain 32dB, P1dB 15dBm, Noise Figure 1.0dB, +12V, SMA-Female

#### PART No.:

TMLA-00800250-3215-10



[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------