

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	10~40GHz
Nominal Coupling	20±1.2dB
Insertion Loss	1.0dB max
Main Line VSWR	1.4 typ, 1.6 max
Coupled Line VSWR	1.4 typ, 1.6 max
Directivity	10dB min
Frequency Sensitivity	±0.9dB typ, ±1.0dB max
Impedance	50 Ohms
Average Power	30W

► Mechanical Data

Input/Output Connectors	2.92mm-Female
Connectors Material	Stainless Steel
Body Material	Aluminum
Surface Finish	Black/Gray/Blue Paint
Dimensions	28×15×11mm

► Environmental Data

Operating Temperature	-40℃~+85℃
-----------------------	-----------

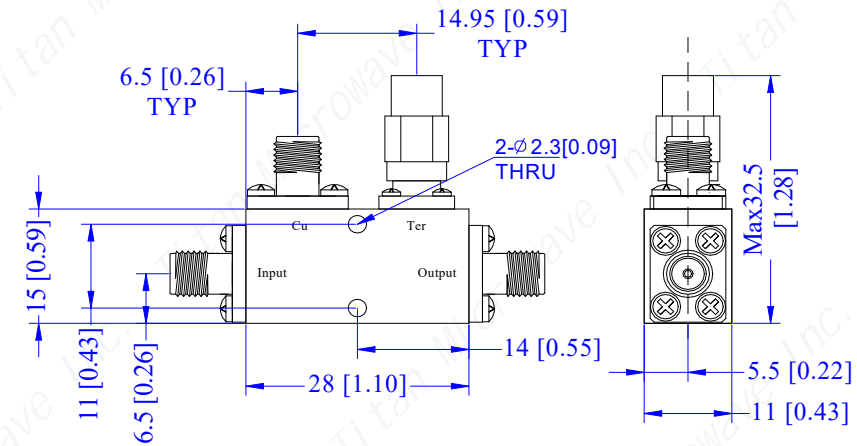

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22		
ENGINEER: J. Zhu 21/12/22		
APPROVED: C. Chen 21/12/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:

Directional Coupler
10-40GHz, Coupling
20dB, 30W
2.92mm-Female

PART No.:

TMDC-10004000-20S30



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------