

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	500~2000MHz
Insertion Loss	1.8dB max (excluding theoretical loss 12.0dB)
Input Port VSWR	1.18:1 typ, 1.3:1 max
Output Port VSWR	1.12:1 typ, 1.2:1 max
Isolation	20dB min, 26dB typ
Amplitude Balance	±0.4dB
Phase Balance	±5°
Impedance	50 Ohms
Power Rating	30W(as a splitter) 2W(as a combiner)

► Mechanical Data

Input/Output Connectors	SMA-Female
Connectors Material	Stainless Steel
Housing Material	Aluminum
Dimensions	230×114×10mm
Surface Finish	Black/Blue/Gray Painted
Weight	610g

► Environmental Data

Operating Temperature	-45°C~+85°C
-----------------------	-------------

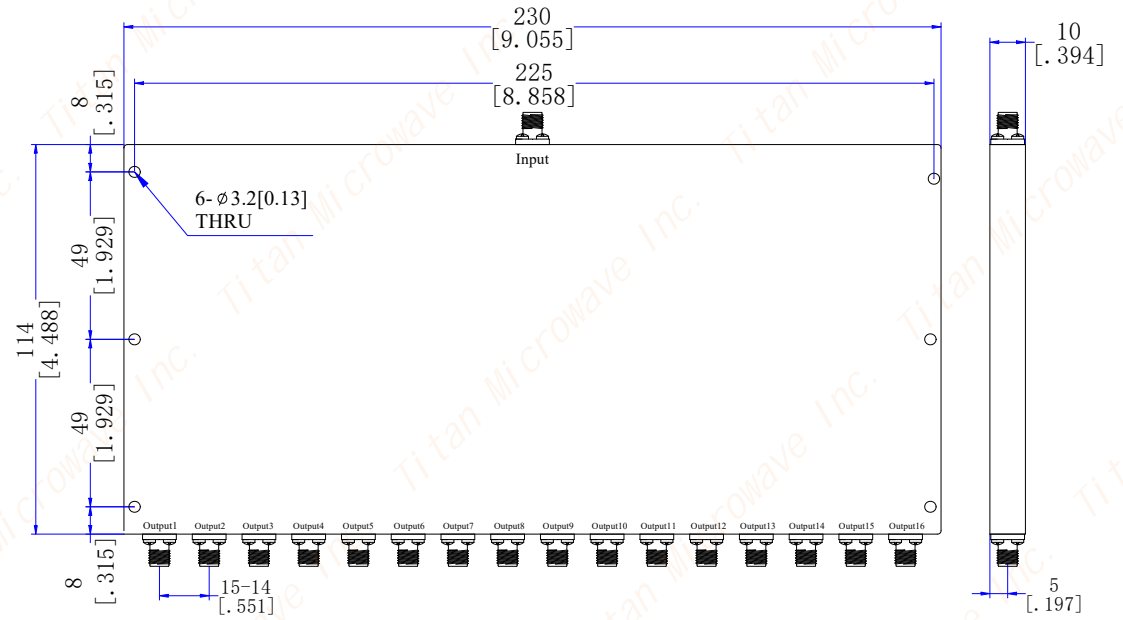

- Notes:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 - CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22		
ENGINEER: J. Zhu 21/12/22		
APPROVED: C. Chen 21/12/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Power Divider, 16 Way,
0.5~2GHz, 30W, SMA-
Female

PART No.:
TMPD16-00500200-30S

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com

DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------