

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/8/21	C. Chen

## TECHNICAL DATA

### ► Electrical Data


Frequency Range	0.04-8GHz
Output Power(P1dB)	18dBm typ
Gain	21dB typ
Gain Flatness	±1.5dB typ
Noise Figure	3.0dB typ
VSWR Input	2:1 typ
VSWR Output	2:1 typ
DC Voltage	+12V
Current	80mA
Input Power(CW)	+5dBm max
Impedance	50 Ohms

### ► Mechanical Data

Dimensions	33×46×12mm
Input/Output Connector	SMA-Female
Weight	105g

### ► Environmental Data

Operating Temperature	-35℃~+75℃
Storage Temperature	-35℃~+75℃

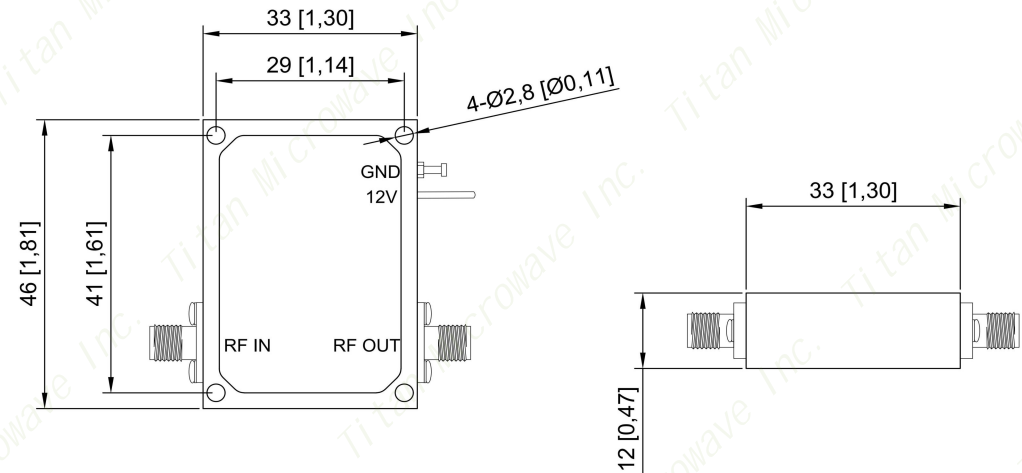

#### Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/08/22		
ENGINEER: J. Zhu 21/08/22		
APPROVED: C. Chen 21/08/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

**TITLE:**  
 Low Noise Amplifier, 0.04-8GHz, Gain 21dB, P1dB 18dBm, Noise Figure 3dB, +12V, SMA-Female

**PART No.:**  
 TMLA-00040800-2118-30



[www.titan-microwave.com](http://www.titan-microwave.com)



DIMENSIONS IN MILLIMETERS(mm)

<b>SIZE:</b> A4	<b>SCALE:</b>	<b>SHEET:</b> 1/1	<b>REV:</b> A
--------------------	---------------	----------------------	------------------