

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/8/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	0.4-6GHz
Output Power(P1dB)	17dBm typ
Gain	20dB typ
Gain Flatness	±2.0dB typ
Noise Figure	3.0dB typ
VSWR Input	2:1 typ
VSWR Output	2:1 typ
DC Voltage	+12V
Current	100mA
Input Power(CW)	+5dBm max
Impedance	50 Ohms

► Mechanical Data

Dimensions	33×46×12mm
Input/Output Connector	SMA-Female
Weight	105g

► Environmental Data

Operating Temperature	-35℃~+75℃
Storage Temperature	-35℃~+75℃

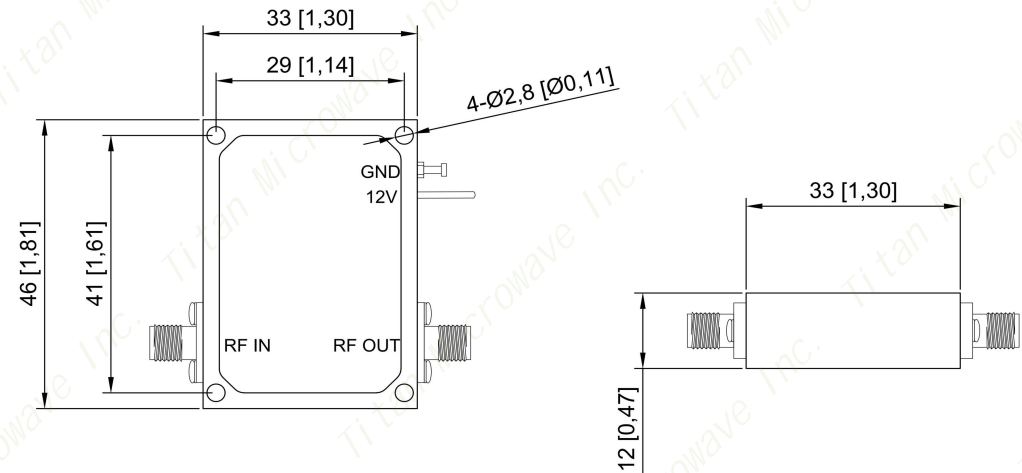

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/08/22		
ENGINEER: J. Zhu 21/08/22		
APPROVED: C. Chen 21/08/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
 Low Noise Amplifier, 0.4-6GHz, Gain 20dB, P1dB
 17dBm, Noise Figure 3dB,
 +12V, SMA-Female

PART No.:
 TMLA-00400600-2017-30



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
--------------------	---------------	----------------------	------------------