

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/8/21	C. Chen

TECHNICAL DATA

Electrical Data


Frequency Range	0.5-6GHz
Output Power(P1dB)	20dBm typ
Gain	40dB typ
Gain Flatness	±2.5dB typ
Noise Figure	1.4dB typ
VSWR Input	1.8:1 typ
VSWR Output	2.0:1 typ
DC Voltage	+12V
Current	350mA
Input Power(CW)	-15dBm max
Impedance	50 Ohms

Mechanical Data

Dimensions	56.7×35.64×12mm
Input/Output Connector	SMA-Female
Weight	150g

Environmental Data

Operating Temperature	-40℃~+55℃
Storage Temperature	-40℃~+85℃

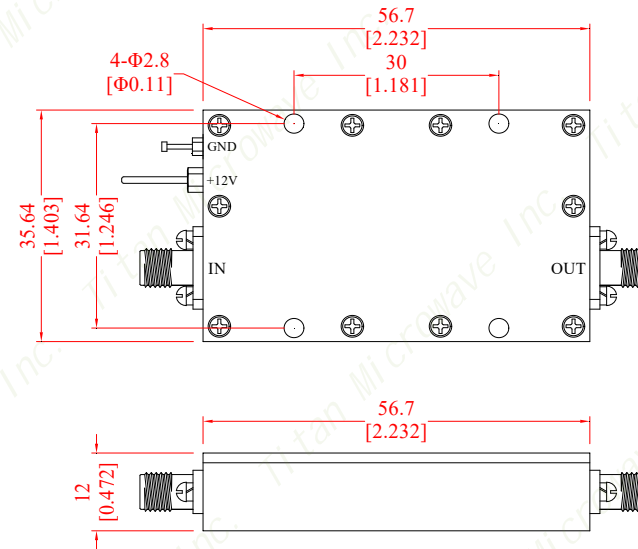

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/08/22		
ENGINEER: J. Zhu 21/08/22		
APPROVED: C. Chen 21/08/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:

Low Noise Amplifier, 0.5-6GHz, Gain 40dB, P1dB 20dBm, Noise Figure 1.4dB, +12V, SMA-Female

PART No.:

TMLA-00500600-4020-14



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE:
A4

SCALE:

SHEET:
1/1

REV:
A