

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	30~65MHz
Insertion Loss	1.0dB max
(excluding theoretical loss 9.0dB)	
Input Port VSWR	1.35:1 max
Output Port VSWR	1.20:1 max
Isolation	28dB min, 30dB typ
Amplitude Balance	±0.3dB
Phase Balance	±3°
Impedance	50 Ohms
Power Rating	1W(as a splitter) 0.5W(as a combiner)

► Mechanical Data

Input/Output Connectors	SMA-Female
Dimensions	120×56×12mm
Surface Finish	Conductive Oxidation
Weight	200g

► Environmental Data

Operating Temperature	-35℃~+75℃
-----------------------	-----------

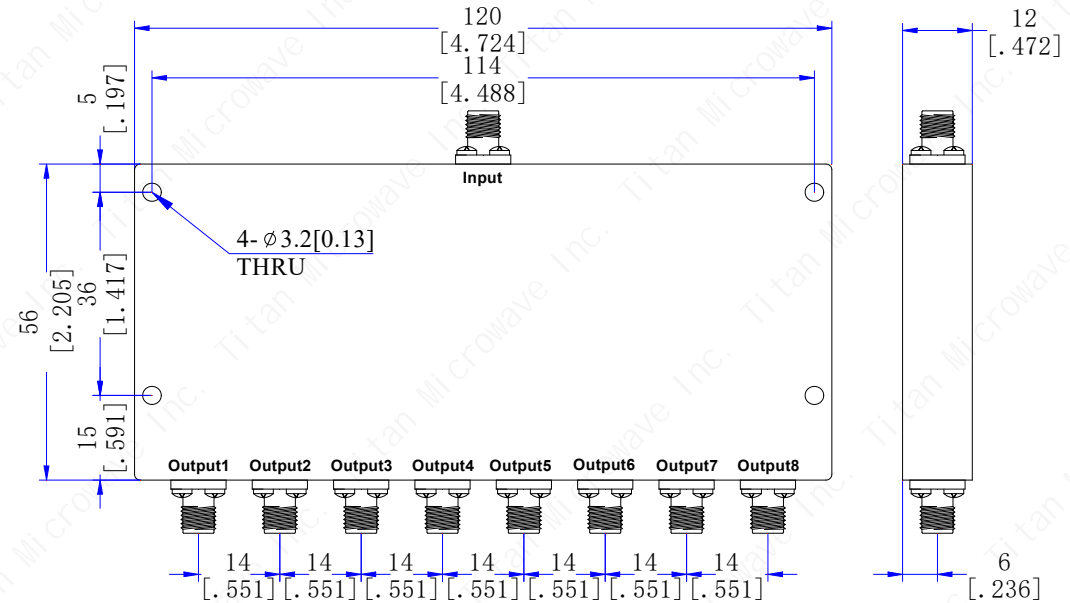

DRAWN: L. Ma 21/12/22		
ENGINEER: J. Zhu 21/12/22		
APPROVED: C. Chen 21/12/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Power Divider
8 Way, 30~65MHz, 1W,
SMA-Female

PART No.:
TMPD8-30M65M-1S

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY