

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	10~1000MHz
Insertion Loss (excluding theoretical loss 9.0dB)	3.0dB max
Input/Output Port VSWR	1.35:1 max
Isolation	18dB min, 26dB typ
Amplitude Balance	±0.5dB
Phase Balance	±5°
Impedance	50 Ohms
Power Rating	1W(as a splitter) 0.5W(as a combiner)

► Mechanical Data

Input/Output Connectors	SMA-Female
Dimensions	120×56×13mm
Surface Finish	Conductive Oxidation
Weight	260g

► Environmental Data

Operating Temperature	-35°C~+75°C
-----------------------	-------------

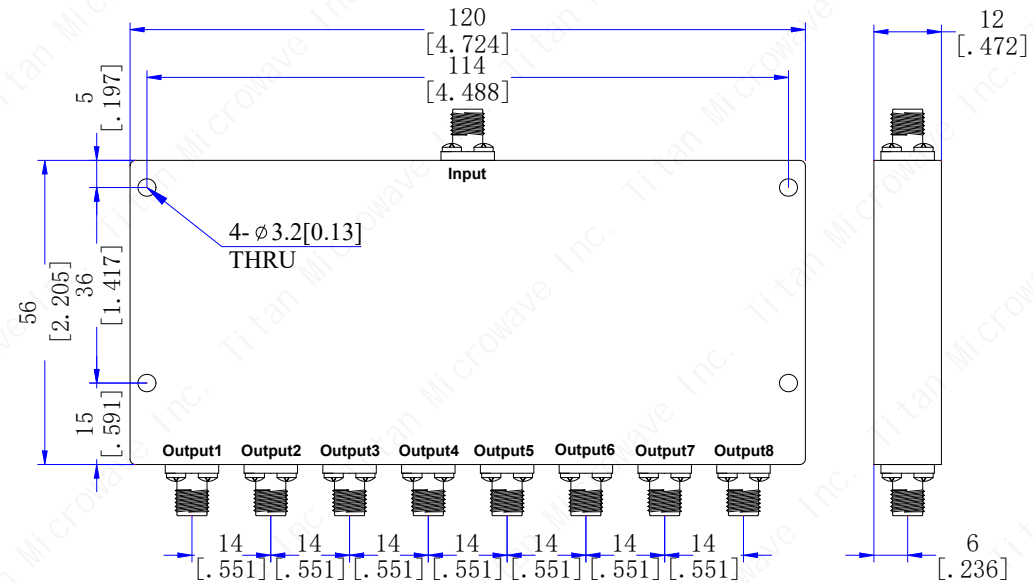

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22		
ENGINEER: J. Zhu 21/12/22		
APPROVED: C. Chen 21/12/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:

Power Divider
8 Way, 10~1000MHz
1W, SMA-Female

PART No.:

TMPD8-00010100-1S



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE:
A4

SCALE:

SHEET:
1/1

REV:
A