

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	10-31GHz
Insertion Loss (excluding theoretical loss 12.0dB)	2.8dB max
Input Port VSWR	1.80 max
Output Port VSWR	1.60 max
Isolation	16dB min
Amplitude Balance	±0.8dB
Phase Balance	±10°
Impedance	50 Ohms
Power Rating	20W(as a splitter) 1W(as a combiner)

► Mechanical Data

Input/Output Connectors	2.92mm-Female
Connector Material	Stainless Steel
Dimensions	208×58×10mm
Surface Finish	Black Painted

► Environmental Data

Operating Temperature	-45℃~+85℃
-----------------------	-----------

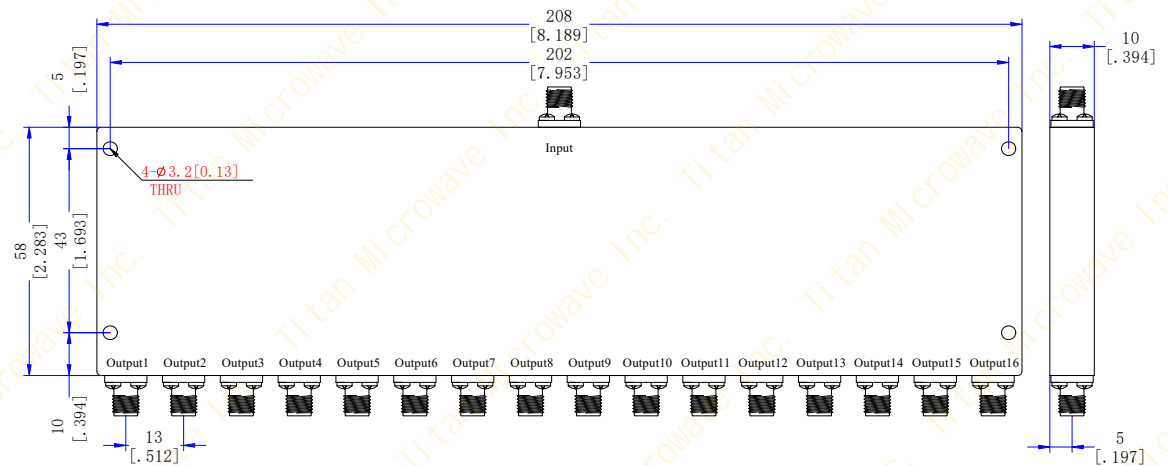

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 21/12/22		
ENGINEER: J. Zhu 21/12/22		
APPROVED: C. Chen 21/12/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Power Divider
16 Way, 10~31GHz, 10W,
2.92mm-Female

PART No.:
TMPD16-10003100-10K

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
--------------------	---------------	----------------------	------------------