


**TMPD2-00500600-20S**

**0.5 to 6 GHz, 20W, SMA-Female  
2-WAY POWER DIVIDER**

**Electrical Characteristics**

<b>Frequency Range</b> .....	500~6000MHz
<b>Insertion Loss</b> .....	0.7dB max
(excluding theoretical loss 3.0dB)	
<b>Amplitude Balance</b> .....	±0.2dB
<b>Phase Balance</b> .....	±2°
<b>VSWR(input port)</b> .....	1.15:1 typ; 1.25:1 max
<b>VSWR(output ports)</b> .....	1.12:1 typ; 1.20:1 max
<b>Isolation</b> .....	22dB min; 26dB typ
<b>Impedance</b> .....	50 Ohms
<b>Power Handling</b> .....	20W(as a splitter)
.....	1W(as a combiner)

**Outline Drawing(mm[inch])**

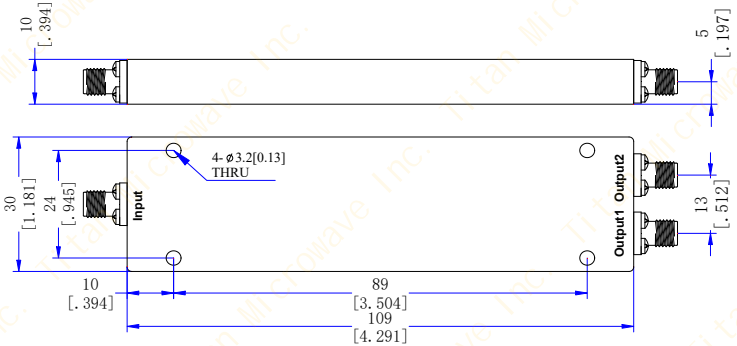

**Mechanical & Environmental Characteristics**

<b>Dimensions</b> .....	30 × 109 × 10mm
<b>RF Connectors</b> .....	SMA-Female
<b>Connectors Material</b> .....	Stainless Steel
<b>Surface Finishing</b> .....	Black/Blue/Black Painted
<b>Operating Temperature</b> .....	-45°C~+85°C
<b>Storage Temperature</b> .....	-50°C~+85°C
<b>Weight</b> .....	80g