

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/8/10	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	0.5~6GHz
Insertion Loss	2.8dB max
(excluding theoretical loss 9.0dB)	
Input Port VSWR	1.18:1 typ, 1.40:1 max
Output Port VSWR	1.12:1 typ, 1.25:1 max
Isolation	18dB min, 26dB typ
Amplitude Balance	±0.3dB
Phase Balance	±5°
Impedance	50 Ohms
Power Rating	30W(as a splitter) 2W(as a combiner)

► Mechanical Data

Input Connector	SMA-Female
Output Connectors	SMP-Male
Dimensions	94×125×10mm
Surface Finish	Black Painted

► Environmental Data

Operating Temperature	-45°C~+85°C
-----------------------	-------------

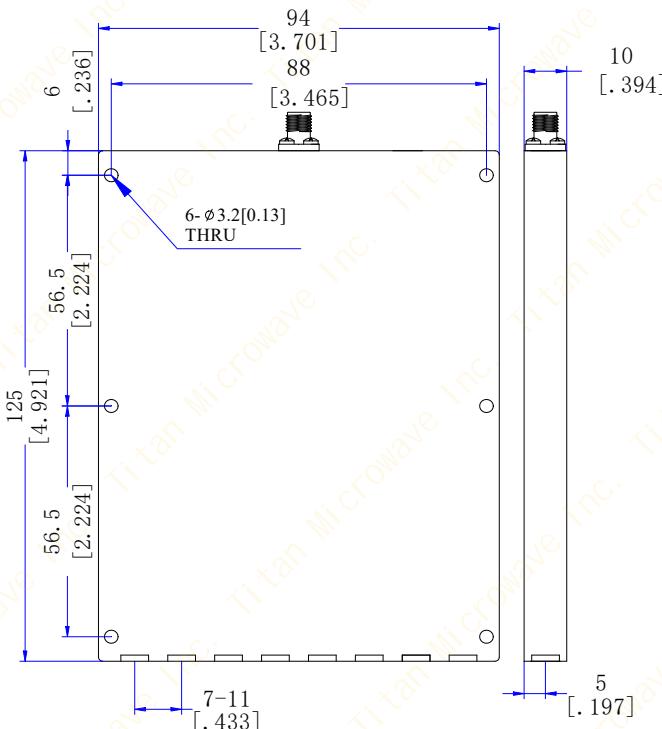

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY


DRAWN: L. Ma 10/08/23
ENGINEER: J. Zhu 10/08/23
APPROVED: C. Chen 10/08/23
TOLERANCE UNLESS OTHERWISE SPECIFIED

x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Power Divider
8 Way, 0.5~6GHz, 30W,
SMA-Female & SMP-Male
PART No.: TMPD8-00500600-30N

TITAN MICROWAVE INC.
A Professional RF & Microwave Components Supplier

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
----------	--------	------------	--------