

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/12/21	C. Chen

TECHNICAL DATA

Electrical Data


Frequency Range	0.45-0.9GHz
Insertion Loss	0.3dB max
VSWR	1.20:1 max
Isolation	20dB min
Amplitude Balance	±0.5dB max
Phase Balance	±2°
Impedance	50 Ohms
Power Rating(CW)	50W

Mechanical Data

Input/Output Connectors	SMA-Female
Dimensions	50×25×11mm
Surface Finish	Black Painted

Environmental Data

Operating Temperature	-45℃~+85℃
-----------------------	-----------

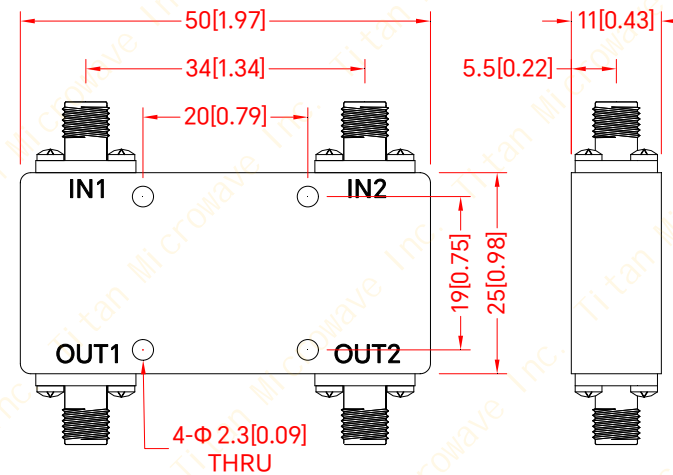

DRAWN: L. Ma 21/12/22		
ENGINEER: J. Zhu 21/12/22		
APPROVED: C. Chen 21/12/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
3dB 90 Deg. Hybrid
Coupler, 0.45~0.9GHz,
50W, SMA-Female

PART No.:
TMHC90-00450090-50S

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -
www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
--------------------	---------------	----------------------	------------------

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY