

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/4/16	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	1000~4000MHz
Insertion Loss	0.5dB max
VSWR	1.3:1 max
Isolation	18dB min
Phase Balance	±5° max
Amplitude Balance	±0.6dB
Power Handling	100W(CW)

► Mechanical Data

Dimensions	45.72×10.16×4.6mm
Connector Type	Stripline
Surface Finish	Gold Plated

► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

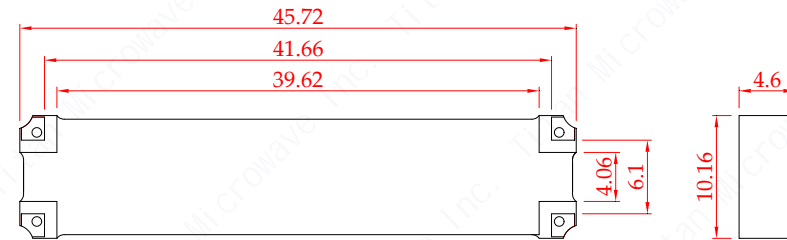

DRAWN: L. Ma 16/04/22		
ENGINEER: J. Zhu 16/04/22		
APPROVED: C. Chen 16/04/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
SMD 90 Degree Hybrid
Coupler, 3dB, 1-4GHz,
100W

PART No.:
TM0175-3A

成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY