


Derating Curve

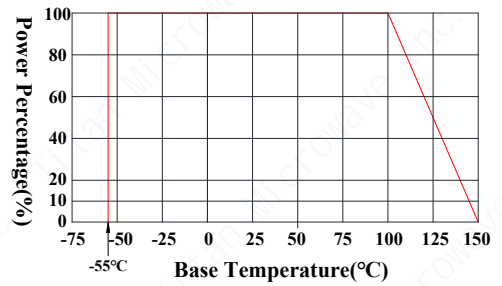

Datasheet

Model Number : TFMA2106

Flanged Attenuator, DC-3GHz, 50W

Specifications

Frequency Range	DC-3GHz	
VSWR	1.5 max	
Nominal Power Handling	50W	
Impedance	50 Ohms	
Attenuation(dB)	0.5~9	10~20
Attenuation Accuracy(dB)	±0.5	±1.0
Substrate Material	Beryllium Oxide(BeO)	
Hat Material	Aluminum Oxide(Al ₂ O ₃)	
Flange	Nickel-plated Copper	
Dimensions	20.8×6.4×3.6mm	
Operating Temperature	-55°C~+150°C	
RoHS Status	RoHS Compliant	

Outline Drawing [mm]:

