


Derating Curve

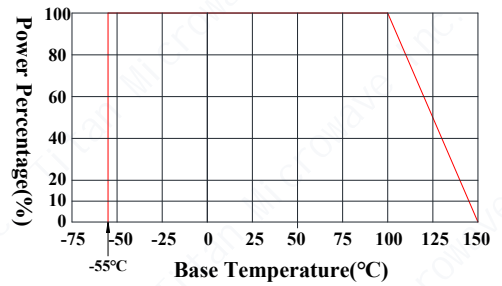

## Datasheet

Model Number : TFMT4826C

**Flanged Mount Termination, DC-1GHz, 800W**

## Specifications

Frequency Range	DC-1GHz
VSWR	1.25 max
Nominal Power Handling	800W
Resistance	50 Ohms Standard
Resistance Tolerance	±5% Standard
Temperature Coefficient	< 150ppm/°C
Substrate Material	Beryllium Oxide(BeO)
Hat Material	Aluminum Oxide(Al <sub>2</sub> O <sub>3</sub> )
Flange	Nickel-plated Copper
Lead	99.99% Sterling Silver
Dimensions	48.25×26.4×8.6mm
Operating Temperature	-55°C~+150°C
RoHS Status	RoHS Compliant

## Outline Drawing [mm]:

