

TECHNICAL DATA

► Electrical Data

Frequency Range	2000~6000MHz
Insertion Loss	0.48dB max
VSWR	1.5:1 max
Isolation	15dB min
Phase Balance	±4.5°
Amplitude Balance	±0.75dB max
Power Handling	150W


► Mechanical Data

Dimensions	10.16×5.08×2mm
Connector Type	SMD
Surface Finish	Immersion Gold
	-Prevent surface from oxidation and scratch


► Environmental Data

Operating Temperature	-55℃~+105℃
-----------------------	------------


Pin Configuration




Top View



Side View



Bottom View

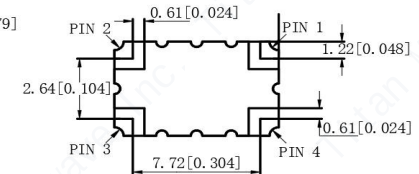

Configuration	Pin 1	Pin 2	Pin 3	Pin 4
Splitter	Input	Isolated	-3dB ∠ θ-90°	-3dB ∠ θ
Splitter	Isolated	Input	-3dB ∠ θ	-3dB ∠ θ-90°
Splitter	-3dB ∠ θ-90°	-3dB ∠ θ	Input	Isolated
Splitter	-3dB ∠ θ	-3dB ∠ θ-90°	Isolated	Input
Combiner	A ∠ θ-90°	A ∠ θ	Isolated	Output
Combiner	A ∠ θ	A ∠ θ-90°	Output	Isolated
Combiner	Isolated	Output	A ∠ θ-90°	A ∠ θ
Combiner	Output	Isolated	A ∠ θ	A ∠ θ-90°

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/11/22	C. Chen

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 22/11/22
ENGINEER: J. Zhu 22/11/22
APPROVED: C. Chen 22/11/22
TOLERANCE UNLESS OTHERWISE SPECIFIED
x ±0.50 [0.019"]
.x ±0.20 [0.008"]
.xx ±0.10 [0.004"]
ANGLES ±1°

TITLE:
SMD 3dB 90° High Power Hybrid Coupler, 2000-6000MHz, 150W
PART No.:
TMHC4000M03L

成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier -			
www.titan-microwave.com			
DIMENSIONS IN MILLIMETERS(mm)			
SIZE: A4	SCALE:	SHEET: 1/1	REV: A