

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/16	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	9.9~10.1GHz
Insertion Loss	0.3dB max
VSWR	1.15:1 max
Isolation	25dB min
Forward Power	30W
Reverse Power	10W
Direction	Clockwise
Impedance	50 Ohms

► Mechanical Data

Dimensions	13×19×12.7mm
Connector Type	Stripline
Material	Aluminum
Surface Finish	Nickel Plated
Weight	20g

► Environmental Data

Operating Temperature	-10℃~+60℃
Storage Temperature	-50℃~+90℃

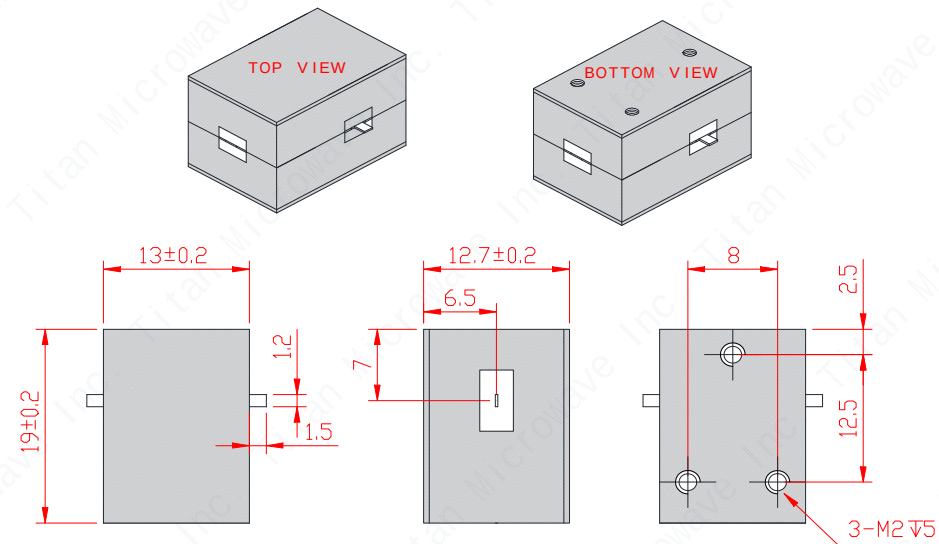

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/09/23	TITLE: Drop-in Isolator 9.9-10.1GHz, 30W	 成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier -			
ENGINEER: J. Zhu 16/09/23		www.titan-microwave.com			
APPROVED: C. Chen 16/09/23		 DIMENSIONS IN MILLIMETERS(mm)			
TOLERANCE UNLESS OTHERWISE SPECIFIED		PART No.: TMDI-09901010-30			
x ±0.50 [0.019"]	PART No.: TMDI-09901010-30	SIZE: A4	SCALE:	SHEET: 1/1	REV: A
.x ±0.20 [0.008"]					
.xx ±0.10 [0.004"]					
ANGLES ±1°					