

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2023/9/16	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	7.5~9GHz
Insertion Loss	0.4dB max
VSWR	1.25:1 max
Isolation	20dB min
Forward Power	30W
Reverse Power	10W
Direction	Clockwise
Impedance	50 Ohms

► Mechanical Data

Dimensions	13×19×12.7mm
Connector Type	Stripline
Material	Aluminum
Surface Finish	Nickel Plated
Weight	20g

► Environmental Data

Operating Temperature	-10℃~+60℃
Storage Temperature	-50℃~+90℃

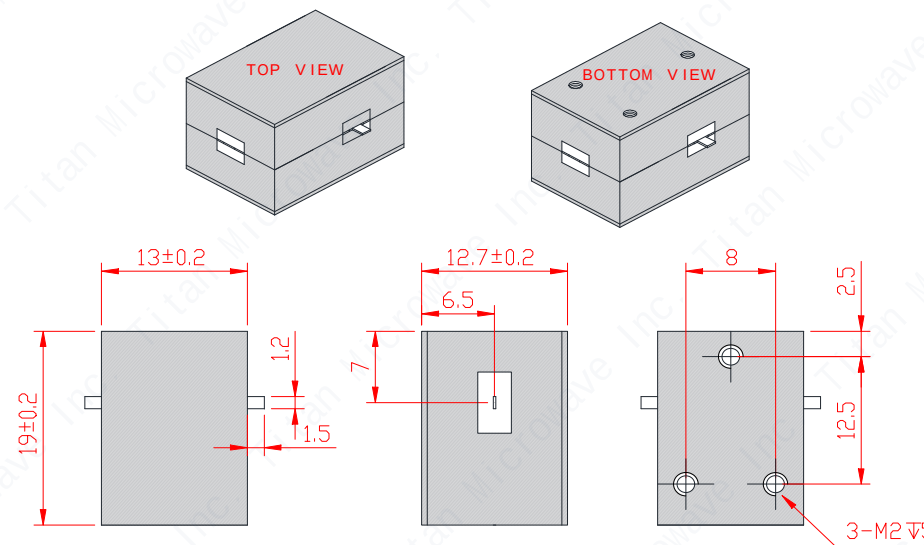

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/09/23	TITLE: Drop-in Isolator 7.5-9GHz, 30W	 成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier -				
ENGINEER: J. Zhu 16/09/23		www.titan-microwave.com				
APPROVED: C. Chen 16/09/23						
TOLERANCE UNLESS OTHERWISE SPECIFIED						
x ±0.50 [0.019"]	PART No.: TMDI-07500900-30		DIMENSIONS IN MILLIMETERS(mm)			
.x ±0.20 [0.008"]			SIZE: A4	SCALE:	SHEET: 1/1	REV: A
.xx ±0.10 [0.004"]						
ANGLES ±1°						