


TECHNICAL DATA

Frequency Range	2700~6200MHz
Insertion Loss(average)	≤0.5dB
VSWR	≤1.4:1
Isolation	≥17dB
Phase Balance	≤±5°
Amplitude Balance	≤±1.0dB
Power Handling	250W(CW)

Dimensions	16×12×2.4mm
Connector Type	SMD
Surface Finish	Immersion Gold

Operating Temperature -55℃~+85℃

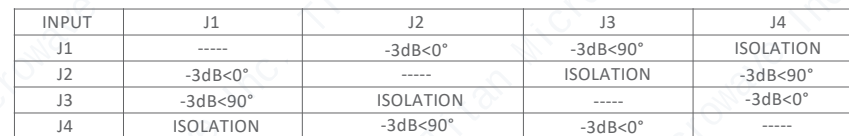

TITLE:	SMD 90° Hybrid Coupler, 3dB, 2700-6200MHz, 250W
PART No.:	TM0176-3

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY