

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/4/16	C. Chen

TECHNICAL DATA

Electrical Data


Frequency Range	2200~2300MHz
Insertion Loss	0.3dB max
VSWR Primary	1.25:1 max
VSWR Secondary	1.25:1 max
Directivity	20dB min
Nominal Coupling	30±1.0dB
Average Power	10W
Impedance	50 Ohms

Mechanical Data

Dimensions	43×11×15mm
Connector Type	SMA-Female
Surface Finish	Gray Painted

Environmental Data

Operating Temperature	-45℃~+85℃
-----------------------	-----------

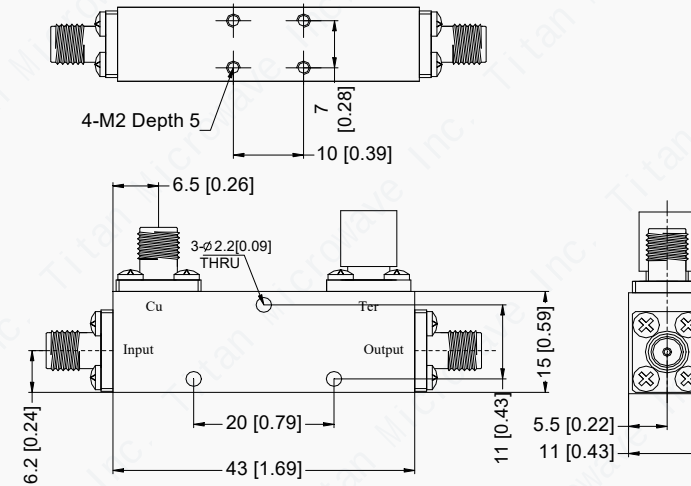

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/04/22
ENGINEER: J. Zhu 16/04/22
APPROVED: C. Chen 16/04/22
TOLERANCE UNLESS OTHERWISE SPECIFIED
x ±0.50 [0.019"]
.x ±0.20 [0.008"]
.xx ±0.10 [0.004"]
ANGLES ±1°

TITLE:
Single Directional Coupler, 2.2~2.3GHz, 30dB, 10W, SMA-Female
PART No.:
TMDC-02200230-30S10

 成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier -			
www.titan-microwave.com			
 DIMENSIONS IN MILLIMETERS(mm)			
SIZE: A4	SCALE:	SHEET: 1/1	REV: A