

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/4/16	C. Chen

TECHNICAL DATA

Electrical Data


Frequency Range	2000~4000MHz
Insertion Loss	0.5dB max
VSWR Primary	1.25:1 max
VSWR Secondary	1.25:1 max
Directivity	18dB min
Nominal Coupling	30±0.8dB
Average Power	50W
Impedance	50 Ohms

Mechanical Data

Dimensions	53×20×20mm
Connector Type	N-Female
Surface Finish	Conductive Oxidation

Environmental Data

Operating Temperature	-45℃~+85℃
-----------------------	-----------

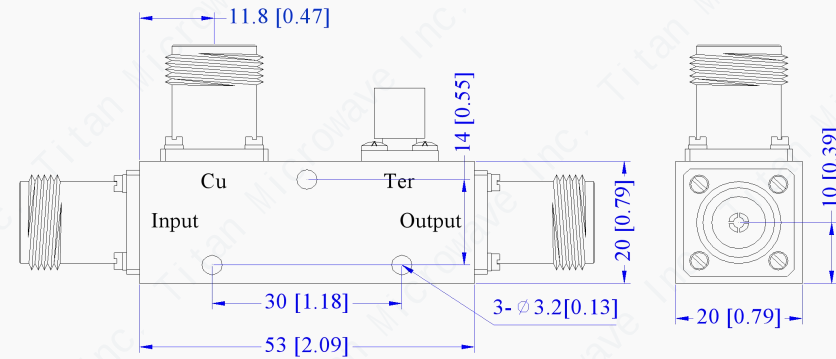

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/04/22
ENGINEER: J. Zhu 16/04/22
APPROVED: C. Chen 16/04/22
TOLERANCE UNLESS OTHERWISE SPECIFIED
x ±0.50 [0.019"]
.x ±0.20 [0.008"]
.xx ±0.10 [0.004"]
ANGLES ±1°

TITLE:
Single Directional Coupler, 2~4GHz, 30dB, 50W, N-Female
PART No.:
TMDC-02000400-30N50

 成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier -			
www.titan-microwave.com			
 DIMENSIONS IN MILLIMETERS(mm)			
SIZE: A4	SCALE:	SHEET: 1/1	REV: A