

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2022/4/16	C. Chen

TECHNICAL DATA

Electrical Data


Frequency Range	2000~40000MHz
Insertion Loss	1.5dB max
VSWR Primary	1.24:1 typ, 1.7:1 max
VSWR Secondary	1.24:1 typ, 1.7:1 max
Directivity	10dB min
Nominal Coupling	20±1.5dB
Frequency Sensitivity	±0.9dB typ, ±1.0dB max
Average Power	30W
Impedance	50 Ohms

Mechanical Data

Dimensions	48×11×15mm
Connector Type	2.92mm-Female
Surface Finish	Black/Gray Painted

Environmental Data

Operating Temperature	-45℃~+85℃
-----------------------	-----------

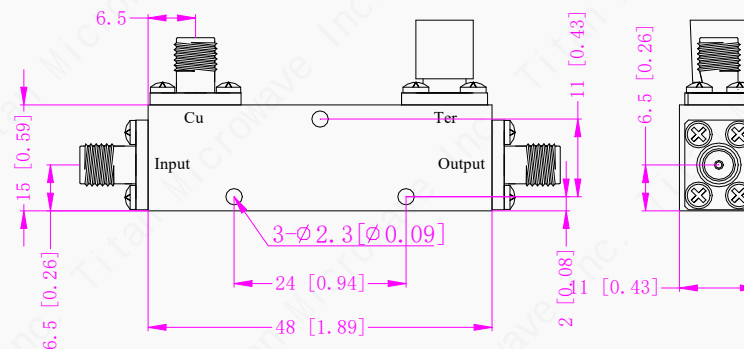

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 16/04/22
ENGINEER: J. Zhu 16/04/22
APPROVED: C. Chen 16/04/22
TOLERANCE UNLESS OTHERWISE SPECIFIED
x ±0.50 [0.019"]
.x ±0.20 [0.008"]
.xx ±0.10 [0.004"]
ANGLES ±1°

TITLE:

Single Directional Coupler,
2~40GHz, 20dB, 30W,
2.92mm-Female

PART No.:

TMDC-02004000-20K30



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE:
A4

SCALE:

SHEET:
1/1

REV:
A