

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/4/30	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	180~220MHz
Coupling	40±1.0dB max
Coupling Flatness	±0.3dB max
Insertion Loss	0.2dB max
Primary Line VSWR	1.3:1 max
Coupled Line VSWR	1.5:1 max
Directivity	20dB min
Impedance	50 Ohms
Peak Power	2000W(PW, Duty Cycle 20%)

► Mechanical Data

Primary Line Connectors	N-Female
Coupled Connectors	SMA-Female
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Dimensions	120×50×26mm

► Environmental Data

Operating Temperature	-10℃~+55℃
-----------------------	-----------

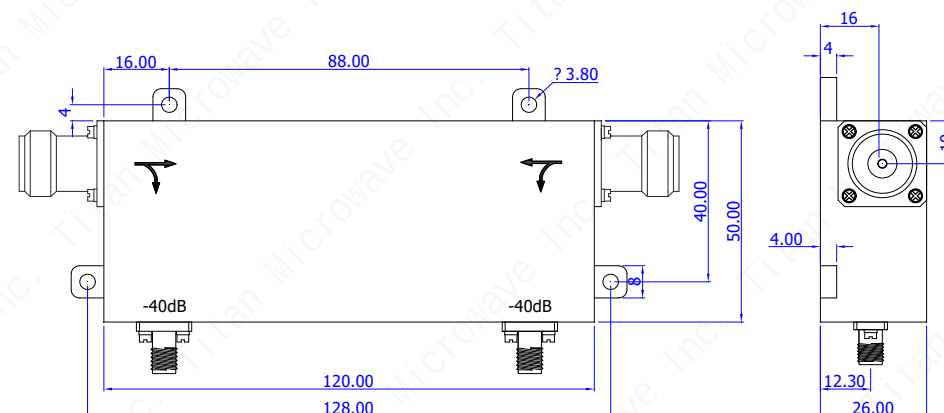

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 30/04/25	TITLE: Dual Directional Coupler, 180-220MHz, 40dB, 2000W(PW), N-Female & SMA-Female	 成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier - www.titan-microwave.com		
ENGINEER: J. Zhu 30/04/25				
APPROVED: C. Chen 30/04/25				
TOLERANCE UNLESS OTHERWISE SPECIFIED				
x ±0.50 [0.019"]	PART No.: TDDC-00180022-40NS2KP	 DIMENSIONS IN MILLIMETERS(mm)		
.x ±0.20 [0.008"]				
.xx ±0.10 [0.004"]				
ANGLES ±1°		SIZE: A4	SCALE:	SHEET: 1/1
				REV: A