

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/4/30	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	200~700MHz
Coupling	30±1dB max
Coupling Variation	±1.0dB max
Insertion Loss	0.4dB max
Primary Line VSWR	1.3:1 max
Directivity	18dB min
Impedance	50 Ohms
Primary Line Power	200W

► Mechanical Data

Primary Line Connectors	SMA-Female
Coupled Connectors	SMA-Female
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Dimensions	70×35×12mm

► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

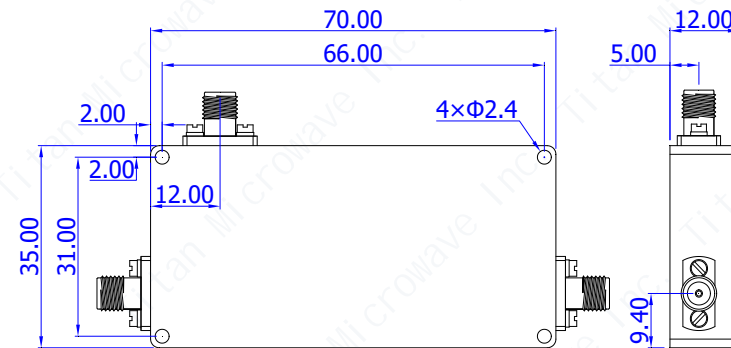

DRAWN: L. Ma 30/04/25		
ENGINEER: J. Zhu 30/04/25		
APPROVED: C. Chen 30/04/25		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Single Directional Coupler,
200~700MHz, 30dB, 200W,
SMA-Female



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

PART No.:
TMDC-00200070-30S200

SIZE:
A4

SCALE:

SHEET:
1/1

REV:
A

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY