

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/4/30	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	300~2000MHz
Coupling	40±1dB max
Coupling Flatness	±1.2dB max
Insertion Loss	0.3dB max
Primary Line VSWR	1.35:1 max
Directivity	18dB min
Impedance	50 Ohms
Primary Line Power	100W(CW)

► Mechanical Data

Primary Line Connectors	SMA-Female
Coupled Connectors	SMA-Female
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Dimensions	85×44×20mm

► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

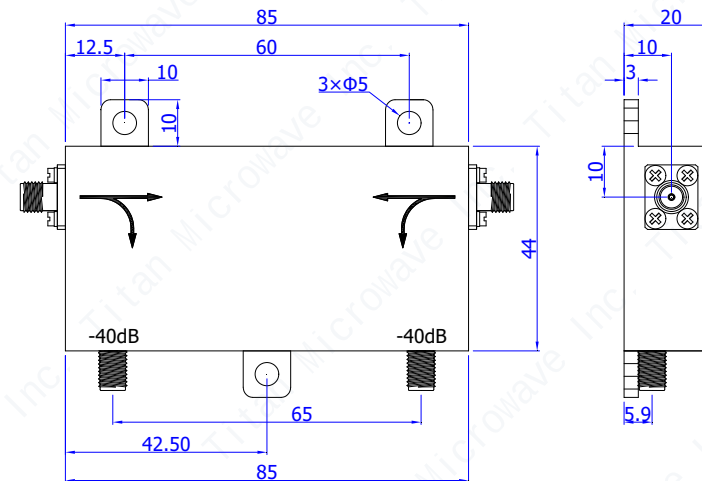

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 30/04/25	TITLE: Dual Directional Coupler, 300~2000MHz, 40dB, 100W, SMA-Female	 成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier - www.titan-microwave.com		
ENGINEER: J. Zhu 30/04/25				
APPROVED: C. Chen 30/04/25		 DIMENSIONS IN MILLIMETERS(mm)		
TOLERANCE UNLESS OTHERWISE SPECIFIED				
x ±0.50 [0.019"]	PART No.: TDDC-00300200-40S100	SIZE: A4 SCALE: SHEET: 1/1 REV: A		
.x ±0.20 [0.008"]				
.xx ±0.10 [0.004"]				
ANGLES ±1°				