

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/4/30	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	600~2700MHz
Coupling	50±1.5dB max
Insertion Loss	0.45dB max
Primary Line VSWR	1.35:1 max
Directivity	16dB min
Impedance	50 Ohms
Primary Line Power	3000W(CW), 6000W(PK)

► Mechanical Data

Primary Line Connectors	DIN 7/16(L29)-Female
Coupled Connectors	SMA-Female
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Dimensions	85×50×32mm

► Environmental Data

Operating Temperature	-40℃~+70℃
-----------------------	-----------

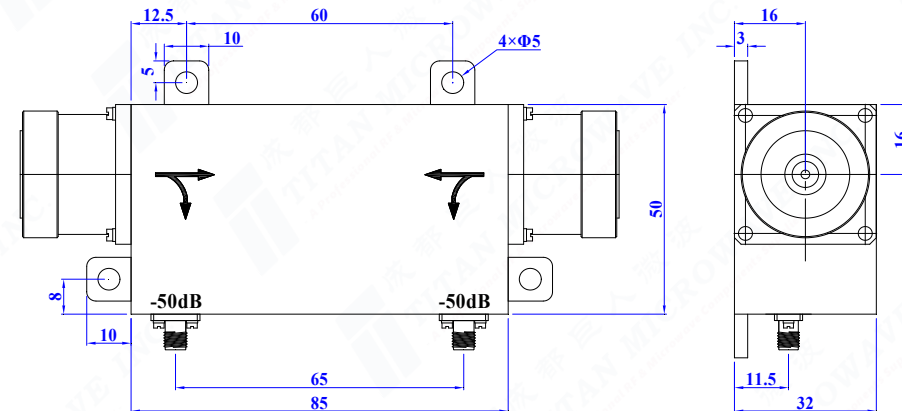

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 30/04/25	TITLE: Dual Directional Coupler, 600~2700MHz, 50dB, 3000W, DIN 7/16(L29)~Female & SMA- Female	 成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier - www.titan-microwave.com		
ENGINEER: J. Zhu 30/04/25				
APPROVED: C. Chen 30/04/25				
TOLERANCE UNLESS OTHERWISE SPECIFIED	PART No.: TDDC-00600270-50DS3KW	 DIMENSIONS IN MILLIMETERS(mm)		
x ±0.50 [0.019"]				
.x ±0.20 [0.008"]				
.xx ±0.10 [0.004"]		SIZE: A4	SCALE:	SHEET: 1/1
ANGLES ±1°				REV: A