


TECHNICAL DATA

Frequency Range	600~3900MHz
Coupling	10±1.5dB
Insertion Loss	0.5dB max
VSWR	1.2:1 max
Directivity	18dB min
Power	50W

Input/Output Connectors	SMA-Female
Coupled Connector	SMA-Female
Material	Aluminum
Surface Treatment	Conductive Oxidation
Dimensions	113×15×11.2mm

Operating Temperature	-40℃~+85℃
Storage Temperature	-50℃~+105℃

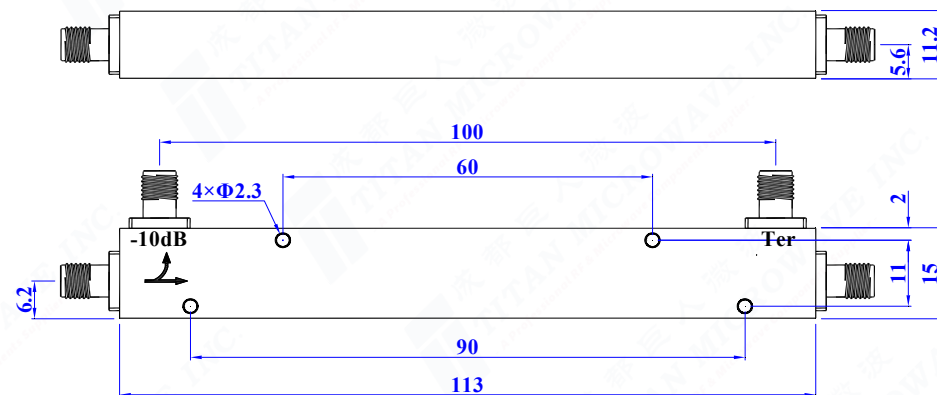

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

TITLE:
Directional Coupler,
600-3900MHz, 10dB,
50W, SMA-Female

TMDC-00600390-10S50



REV:	A
------	---