

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/4/30	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	1000~4000MHz
Coupling	40±1.0dB
Coupling Flatness	±0.8dB max
Insertion Loss	0.3dB max
Primary Line VSWR	1.3:1 max
Coupled Line VSWR	1.4:1 max
Directivity	15dB min
Impedance	50 Ohms
Primary Line Power	800W(CW), 8000W(PK)

► Mechanical Data

Primary Line Connectors	DIN 7/16(L29)-Female
Coupled Connectors	SMA-Female
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Dimensions	100×36×36mm

► Environmental Data

Operating Temperature	-25℃~+70℃
-----------------------	-----------

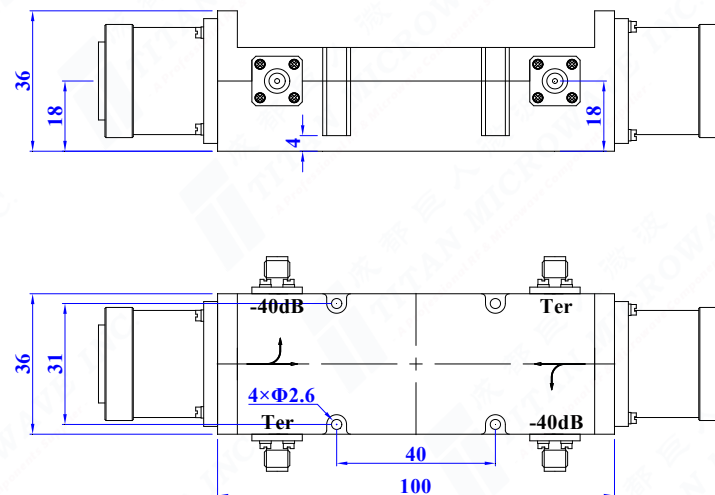

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 30/04/25
ENGINEER: J. Zhu 30/04/25
APPROVED: C. Chen 30/04/25
TOLERANCE UNLESS OTHERWISE SPECIFIED
x ±0.50 [0.019"]
.x ±0.20 [0.008"]
.xx ±0.10 [0.004"]
ANGLES ±1°

TITLE:

Dual Directional Coupler,
1000~4000MHz, 40dB,
800W, DIN
7/16(L29)~Female &
SMA-Female

PART No.:

TDDC-001000400-40DS800



www.titan-microwave.com



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------