

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/4/30	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	4KHz~400MHz
Coupling	40±1.0dB
Coupling Flatness	±0.5dB max
Insertion Loss	0.4dB max
Primary Line VSWR	1.25:1 max
Coupled Line VSWR	1.5:1 max
Directivity	20dB min
Impedance	50 Ohms
Primary Line Power	300W(CW)

► Mechanical Data

Primary Line Connectors	N-Female
Coupled Connectors	SMA-Female
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Dimensions	120×45×45mm

► Environmental Data

Operating Temperature	-20℃~+60℃
-----------------------	-----------

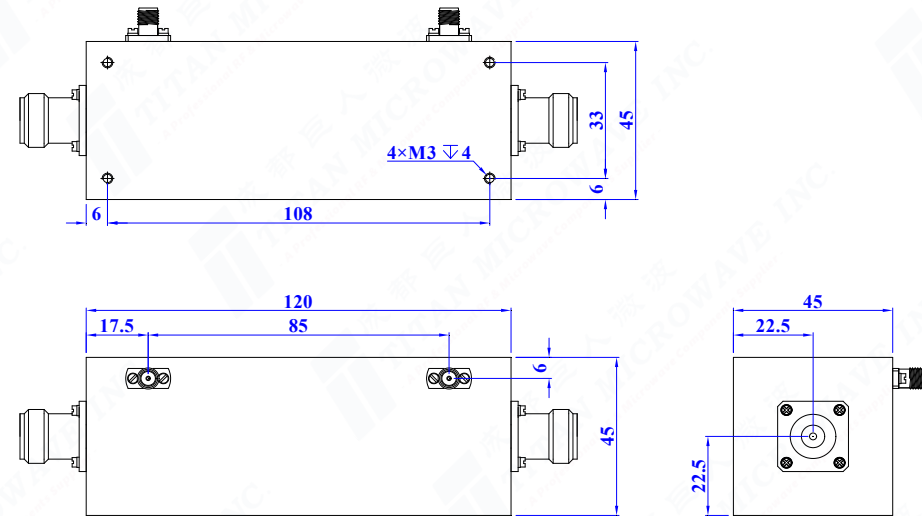

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 30/04/25			成都巨人微波 TITAN MICROWAVE INC. - A Professional RF & Microwave Components Supplier - www.titan-microwave.com	
ENGINEER: J. Zhu 30/04/25				
APPROVED: C. Chen 30/04/25				
TOLERANCE UNLESS OTHERWISE SPECIFIED				
TITLE: Dual Directional Coupler, 4KHz~400MHz, 40dB, 300W, N-Female & SMA-Female			DIMENSIONS IN MILLIMETERS(mm) SIZE: A4 SCALE: SHEET: 1/1 REV: A	
PART No.:				
TDDC-4K400M-40NS300				
x	±0.50	[0.019"]		
.x	±0.20	[0.008"]		
.xx	±0.10	[0.004"]		
ANGLES	±1°			