

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/4/30	C. Chen

TECHNICAL DATA

► Electrical Data


Frequency Range	9KHz~100MHz
Coupling	50±1.0dB
Coupling Flatness	±0.5dB max
Insertion Loss	0.15dB max
Primary Line VSWR	1.15:1 max
Coupled Line VSWR	1.3:1 max
Directivity	20dB min
Impedance	50 Ohms
Primary Line Power	2000W(CW)

► Mechanical Data

Primary Line Connectors	N-Female
Coupled Connectors	SMA-Female
Housing Material	Aluminum
Surface Finish	Conductive Oxidation
Dimensions	172.4×55.9×55.9mm

► Environmental Data

Operating Temperature	-55℃~+85℃
-----------------------	-----------

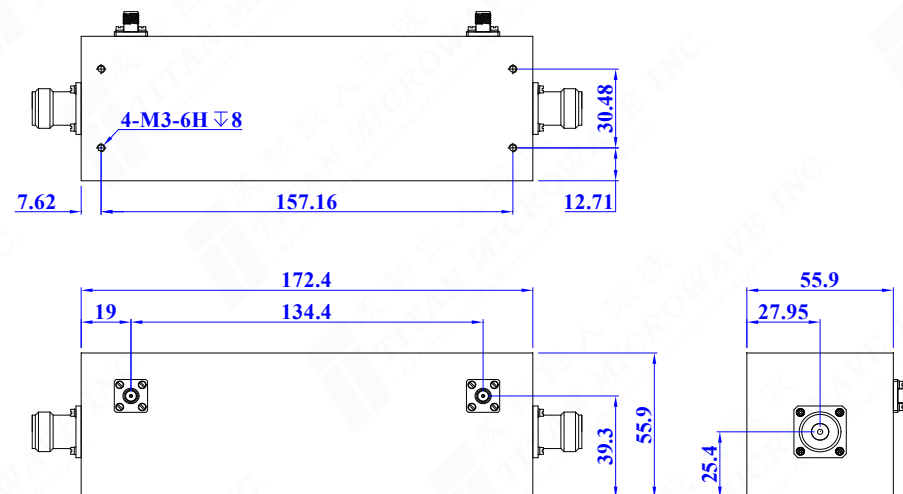

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 30/04/25			TITLE: Dual Directional Coupler, 9KHz~100MHz, 50dB, 2000W, N-Female & SMA-Female	成都巨人微波 TITAN MICROWAVE INC. A Professional RF & Microwave Components Supplier www.titan-microwave.com			
ENGINEER: J. Zhu 30/04/25							
APPROVED: C. Chen 30/04/25							
TOLERANCE UNLESS OTHERWISE SPECIFIED							
x	±0.50	[0.019"]	PART No.: TDDC-9K100M-50NS2KW	DIMENSIONS IN MILLIMETERS(mm)			
.x	±0.20	[0.008"]					
.xx	±0.10	[0.004"]					
ANGLES	±1°						
			SIZE:	SCALE:	SHEET:	REV:	
			A4		1/1	A	